




# IPAUL<sup>®</sup>

## LINPO Series

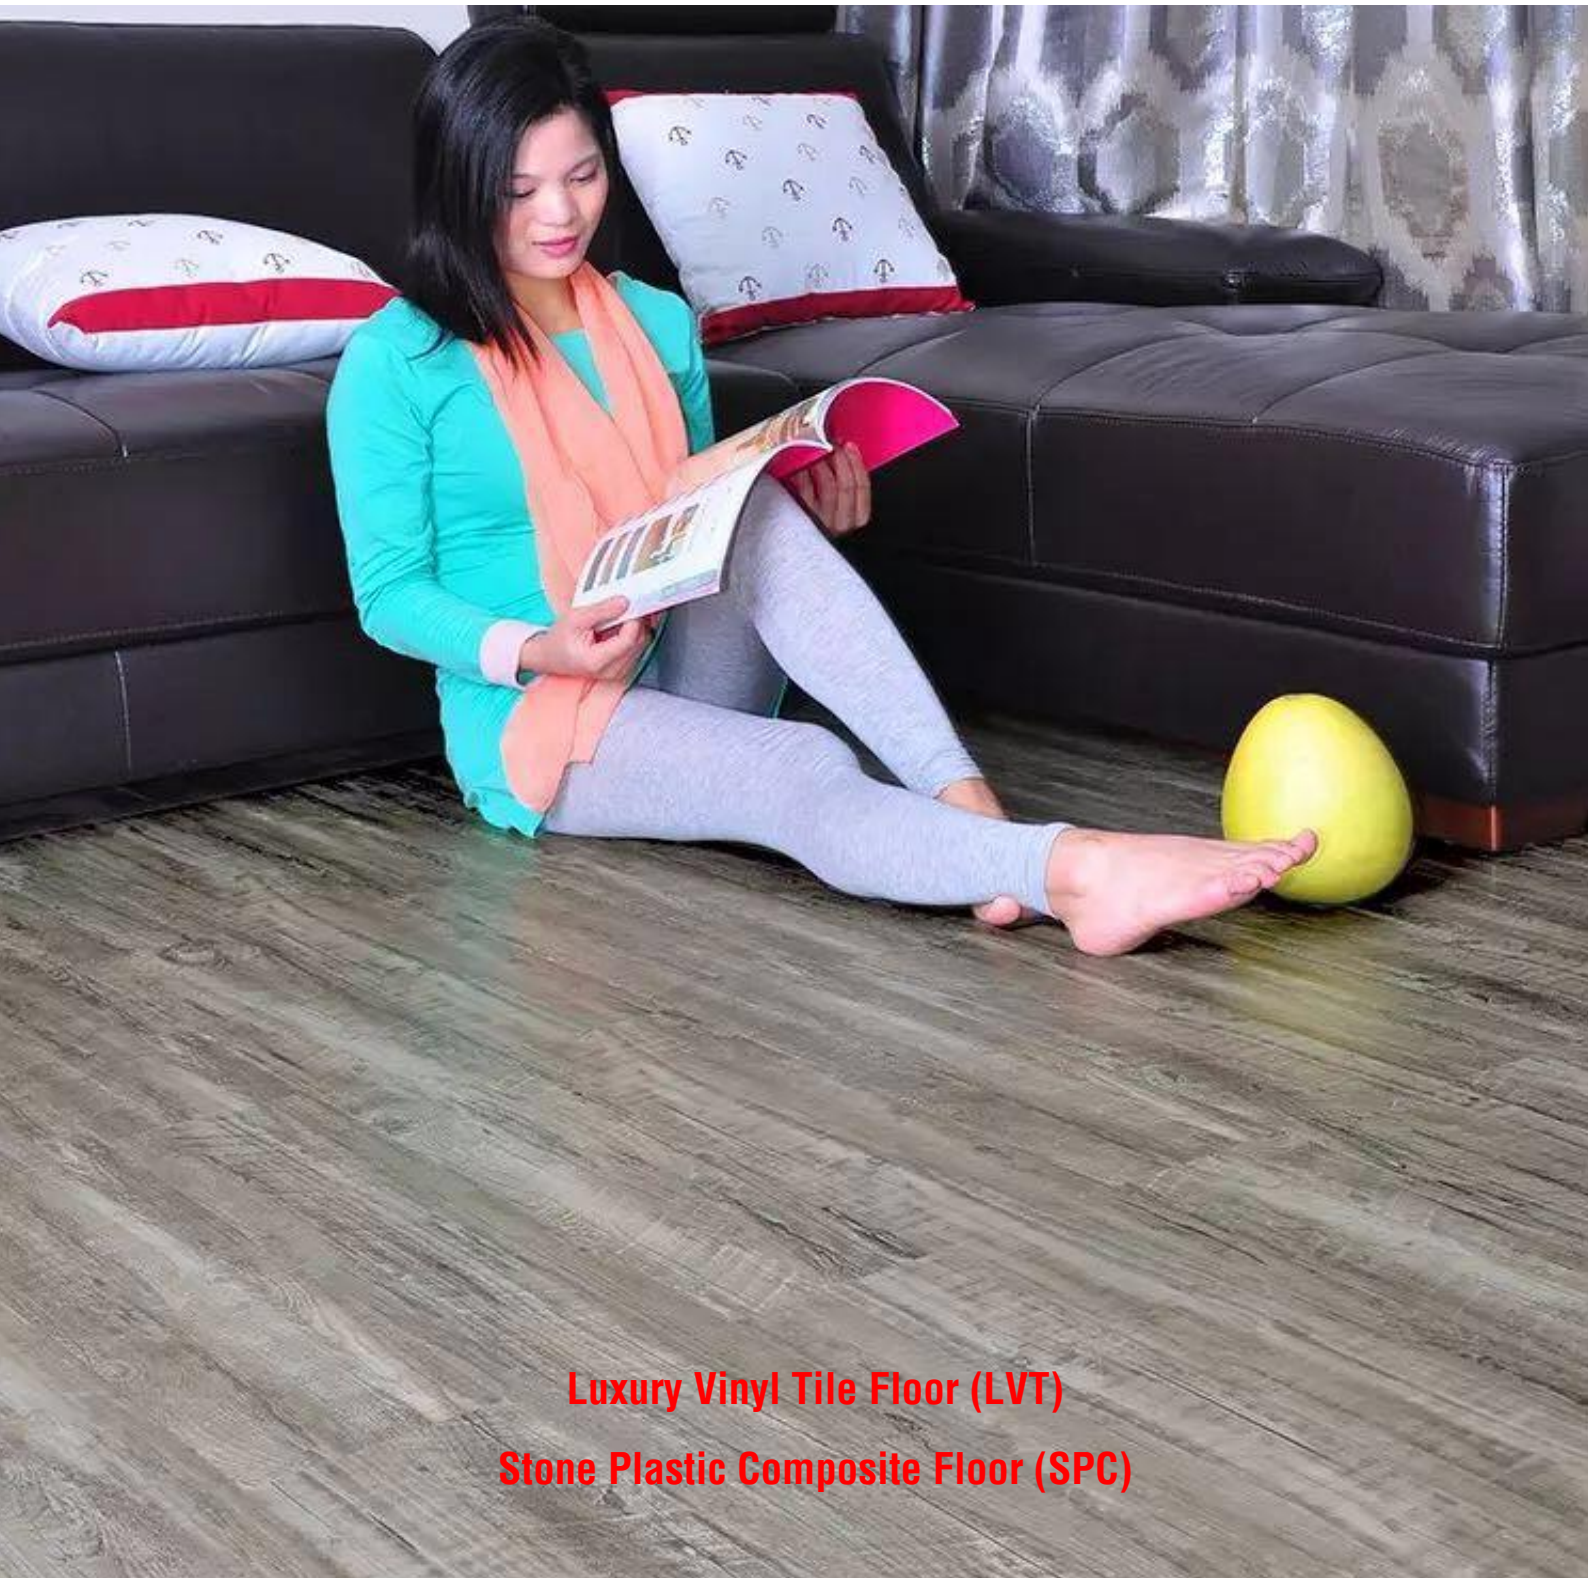

**Luxury Vinyl Tile Floor (LVT)**

**Stone Plastic Composite Floor (SPC)**

IPAUL are fully committed to develop, produce, sell and install PVC resilient flooring (PVC Floor/ Vinyl Resilient Floor/Homogeneous PVC Floor, LVT/LVS/SPC/WPC). We provide excellent flooring products and service for our customer.

Our head office located in Guangzhou, products sell well all over China, and we also export our products to The Americas, Europe, Southeast Asian country, Middle East, Africa and so on. Our flooring has rich colors, good performance, It is well received by our customers. With a fully functional workshop, advanced PVC plastic floor production equipment and product testing center, then a full range of strict quality control is carried out for the production process of the product.

We actively advocate the "low-carbon and environmental building materials". Our PVC roller sheet, PVC tiles and rubber flooring are widely use for medical institution, educational services, office place, Residential area, airport, hotel, gym, library, club, shopping mall, factory and so on. It brings comfortable space for the customers to learn, work, exercise and live.

IPAUL floors have been fully recognized and affirmed by the market since launch. It has won a series of awards such as "Top ten brands of Chinese resilient flooring industry", "China's famous brands", "the first choice brand of green environmental protection", "the first choice brand of national engineering building materials" and "AAA grade Chinese quality credit enterprise". Our products had passed the European CE and SGS certification, ISO9001 quality management certification and ISO14001 environmental management system certification. IPAUL has become the supervision unit of Guangdong building materials industry association, and the executive director unit of China's resilient floor industry, which has a high reputation in the floor industry.

IPAUL has always been to "professional and outstanding" the management idea of serving our customers, cooperate with our new and old customers hand in hand to win a better future, our company all staff sincerely welcome all kinds friend inquiry, negotiation, cooperation and communication. And strives to make unremitting efforts to create an international famous national brand for IPAUL PVC resilient floor.



## Luxury Vinyl Tile Floor (LVT)

IPAUL offer the Luxury Vinyl Tile Floor (LVT) for residential or commercial application. We can make real wood texture, or the styles nearly very similar to marble or carpet tile. LVT have different types for different application.

1. Anti-slip, Waterproof and Fireproof.
2. Anti-aging and durable, Sound absorption.
3. Eco-friendly, Recycled and with 0 formaldehyde.
4. Easy of installation and maintenance.
5. With UV coating, Anti-scratch, Light weight.
6. Realistic, Elegant appearance.


Name	Feature	Install way	Thickness	Wear Layer	Size( Inches)
<b>Dry Back</b>	Dry back Vinyl is perfect for young families because it's cost effective, low maintenance and provides a fantastic realistic look. Another benefit of vinyl flooring is how durable it is.	Flooring boarding with professional glue	2.0mm 2.5mm 3.0mm	0.2mm 0.3mm 0.5mm	6*36 6*48 7.25*48
<b>Self Adhesive</b>	Self adhesive vinyl planks are coated with a layer of pressure sensitive glue. This means that you can simply pull off the paper separator and the planks are ready to be installed.	Have self-adhesive layer on the back, floor boarding by yourself	2.0mm 2.5mm 3.0mm	0.2mm 0.3mm 0.5mm	6*36 6*48 7.25*48
<b>Unilin Click</b>	Click together vinyl planks interlock together to create a realistic wood or stone look. They can be glued down or installed as a floating floor. Click together can be installed with minimal tools.	Click system	4.0mm 5.0mm	0.3mm 0.5mm	6*36 6*48 7.25*48
<b>Loose Lay</b>	Loose lay is the fantastic do-it-yourself glueless floor system, It is a non-click vinyl plank/tile which is laid by just butting up the edges to each other tightly.	Flooring Boarding directly by its dead-weight	5.0mm	0.55mm	7.25*48 9*48




## LVT/ SPC/ WPC with Click system

Items	Discription
Size (available)	6" x 36" / 7"X48" / 9" x 48"
Thickness (available)	4.0mm / 4.2mm / 5.0mm/ 7.0mm (WPC)
Wear layer (available)	0.3mm / 0.5mm / 0.7mm
Surface treatment	UV coated with matt finish
Soft base pad	EVA, IXPE, or Soft wood sheet will be stick on the bottom to reduce the acoustic and increase the foot softy feeling
Base core	LVT, SPC, and WPC is different with the base core material
Installation	Unilin Click ( Standard) or Valinge Click
Features	Waterproof / Anti -slip / Wear-resistance / Fire-resistance / Sound barrier
Advantages	Easy click to install


### IPAUL LVT floor with unilin lock

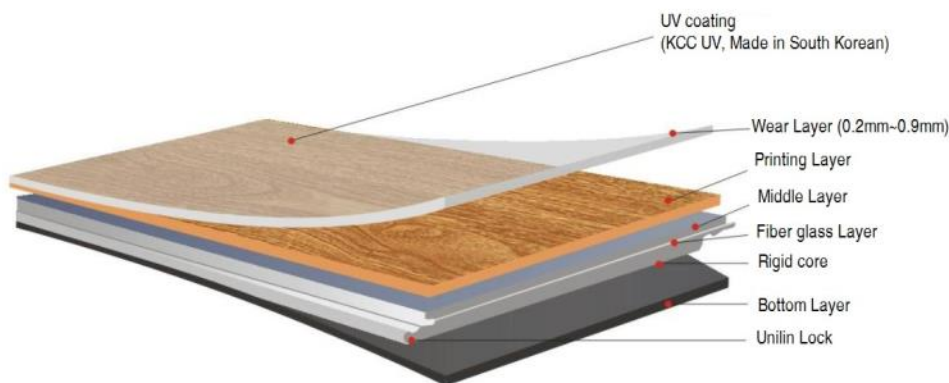


### Locking System




### IPAUL SPC/ WPC Flooring with Unilin Click

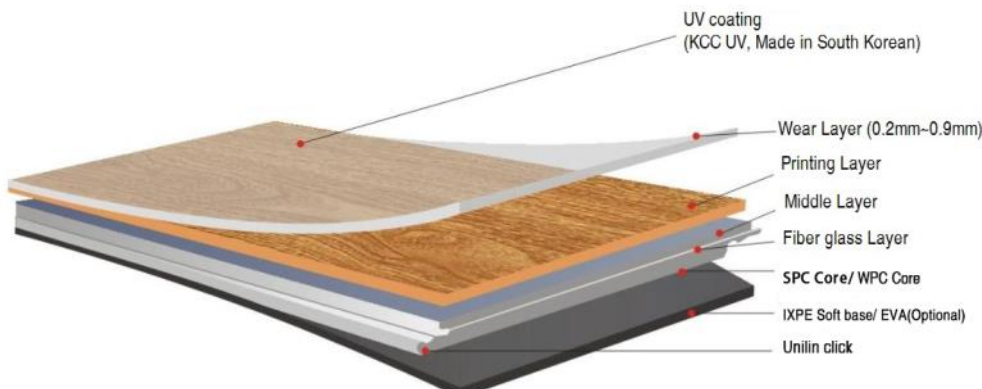


### Locking System






 BL-6313




 BL-6314




 BL-6321




 BL-6323




 BL-6326




 BL-6327




 BL-6328




 BL-6329




 BL-6330




 BL-6332




 BL-6333




 BL-6334




 BL-6335




 BL-6336




 BL-6337




 BL-6340




 BL-6341




 BL-6342




 BL-6345




 BL-6348






 BL-6206




 BL-6209




 BL-6220




 BL-6223




 BL-6224




 BL-6226






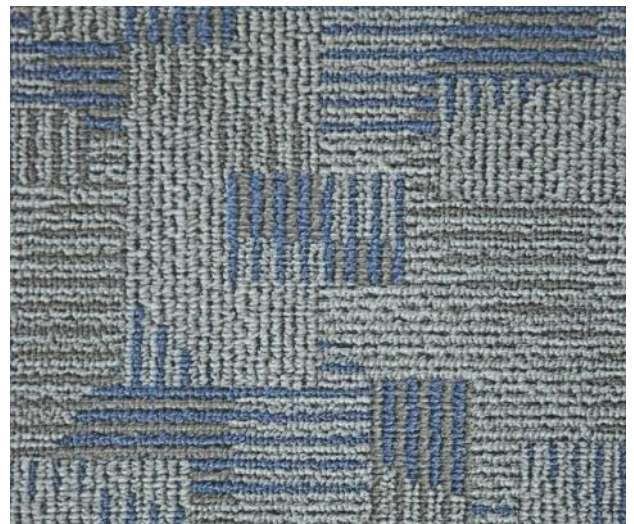
 BL-6228



 BL-6229




 BL-6230




 BL-6231






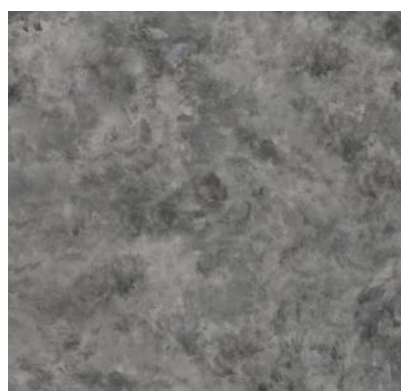
 BL-6120




 BL-6121




 BL-6122




 BL-123




 BL-6125




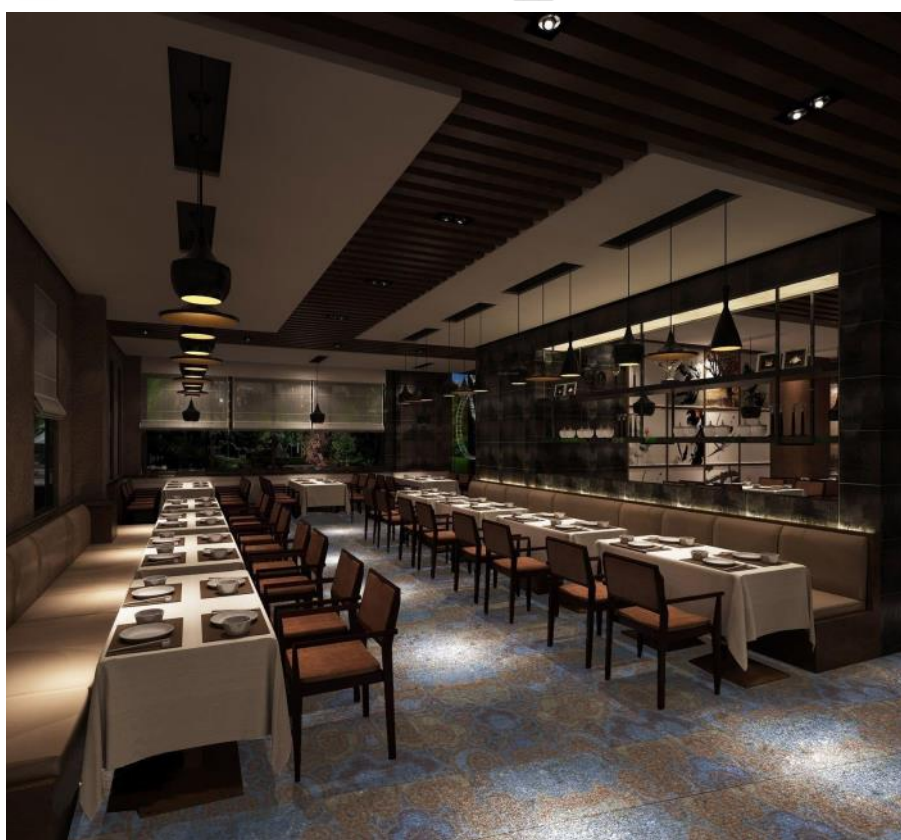
 BL-6126




 BL-6128




 BL-6129






 17010-1 Oak Parquet




 17010-2 Oak Parquet




 17010-3 Oak Parquet




 17010-4 Oak Parquet




 17010-5 Oak Parquet



 17010-6 Oak Parquet




 17010-7 Oak Parquet



 17011 Chop wood mixed pattern




 17011-1 Chop wood mixed pattern

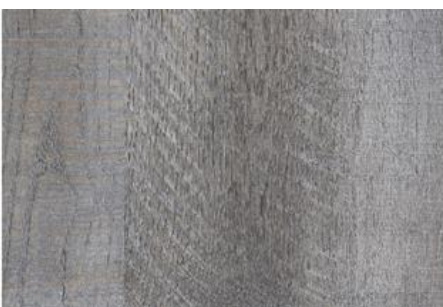

 17011-2 Chop wood mixed pattern




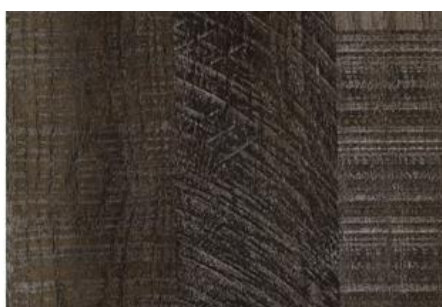
 17011-3 Chop wood mixed pattern

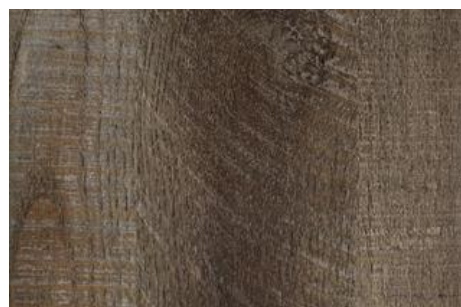


 17011-4 Chop wood mixed pattern




 17010-1 Oak Parquet




 17010-1 Oak Parquet




 17010-1 Oak Parquet




 17012-1 pine oak superposition




 17012-2 pine oak superposition




 17012-3 pine oak superposition




 17012-4 pine oak superposition




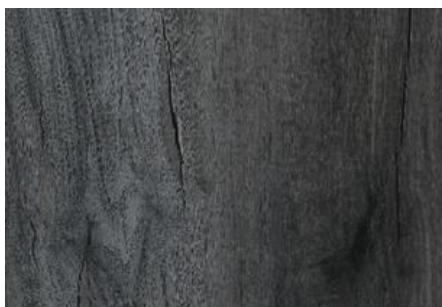
 17012-5 pine oak superposition




 17013 Persia Oak




 17013-1 Persia Oak




 17013-2 Persia Oak




 17013-3 Persia Oak




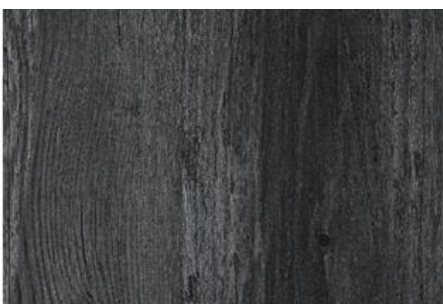
 17013-4 Persia Oak




 17013-5 Persia Oak




 17014-1 Cement Pine




 17014-2 Cement Pine



 17014-3 Cement Pine



 17014-4 Cement Pine


## Technical specification

DESCRIPTION	STANDARD	RESULT
Total thickness	EN428	2.0mm~8.0mm
Thickness of wear layer	EN429	0.20mm~0.7mm
Dimension (Wood)	EN426	101.6x 914.4 mm (4"*36")
Dimension (Mixed Wooden pattern)		152.4 x 914.4mm (6"*36")
		152.4*1219.2 mm (6"*48")
		184.15*1219.2 mm(7"*48")
Dimension (Marble, Carpet)	EN426	457.2 x 457.2mm (18"*18")
		457.2 x 914.4 mm (18"*36")
<b>CLASSIFICATION</b>		
Norm/Product specification	EN649	GB/T 11982.1-2005
Fire rating	EN 13 501-1	Bfl-s1
Fire rating	GB 8624-2012	b1(B-s1,t0)
Toxic testing	GB 18586-2001	Pass
REACH (163 SVHC)	SGS SVHC	Pass
ROSHS RoSHS	IEC	Pass
RoHS	EN71-3	Pass
Slip resistance wet	DIN 51 130	R9
<b>PERFORMANCE</b>		
Abrasion resistance	EN 660.2	≤2.0mm
Abrasion group	EN 649	T (group) <sup>3</sup>
Dimensional stability	EN 434	≤0.4%
Residual indentation	EN 433	0.02mm
Thermal conductivity	EN 12 524	0.25W/ (m.K)
Color fastness	EN 20 105 - B02	≥ 7 degree
Dimensional stability after exposure to heat (horizontal)	GB/T 11982.1-2005	0.07mm
Dimensional stability after exposure to heat (vertical)	GB/T 11982.1-2005	0.19mm
Peel strength (horizontal)	GB/T 11982.1-2005	92.99N/50mm
Peel strength (vertical)	GB/T 11982.1-2005	90.23N/50mm
TVOC TVOC*	ISO 16000-9	Pass
Formaldehyde	ISO 1600-9 : 2006	ND
Acetaldehyde	ISO 1600-9 : 2006	ND



# Certificates and honors



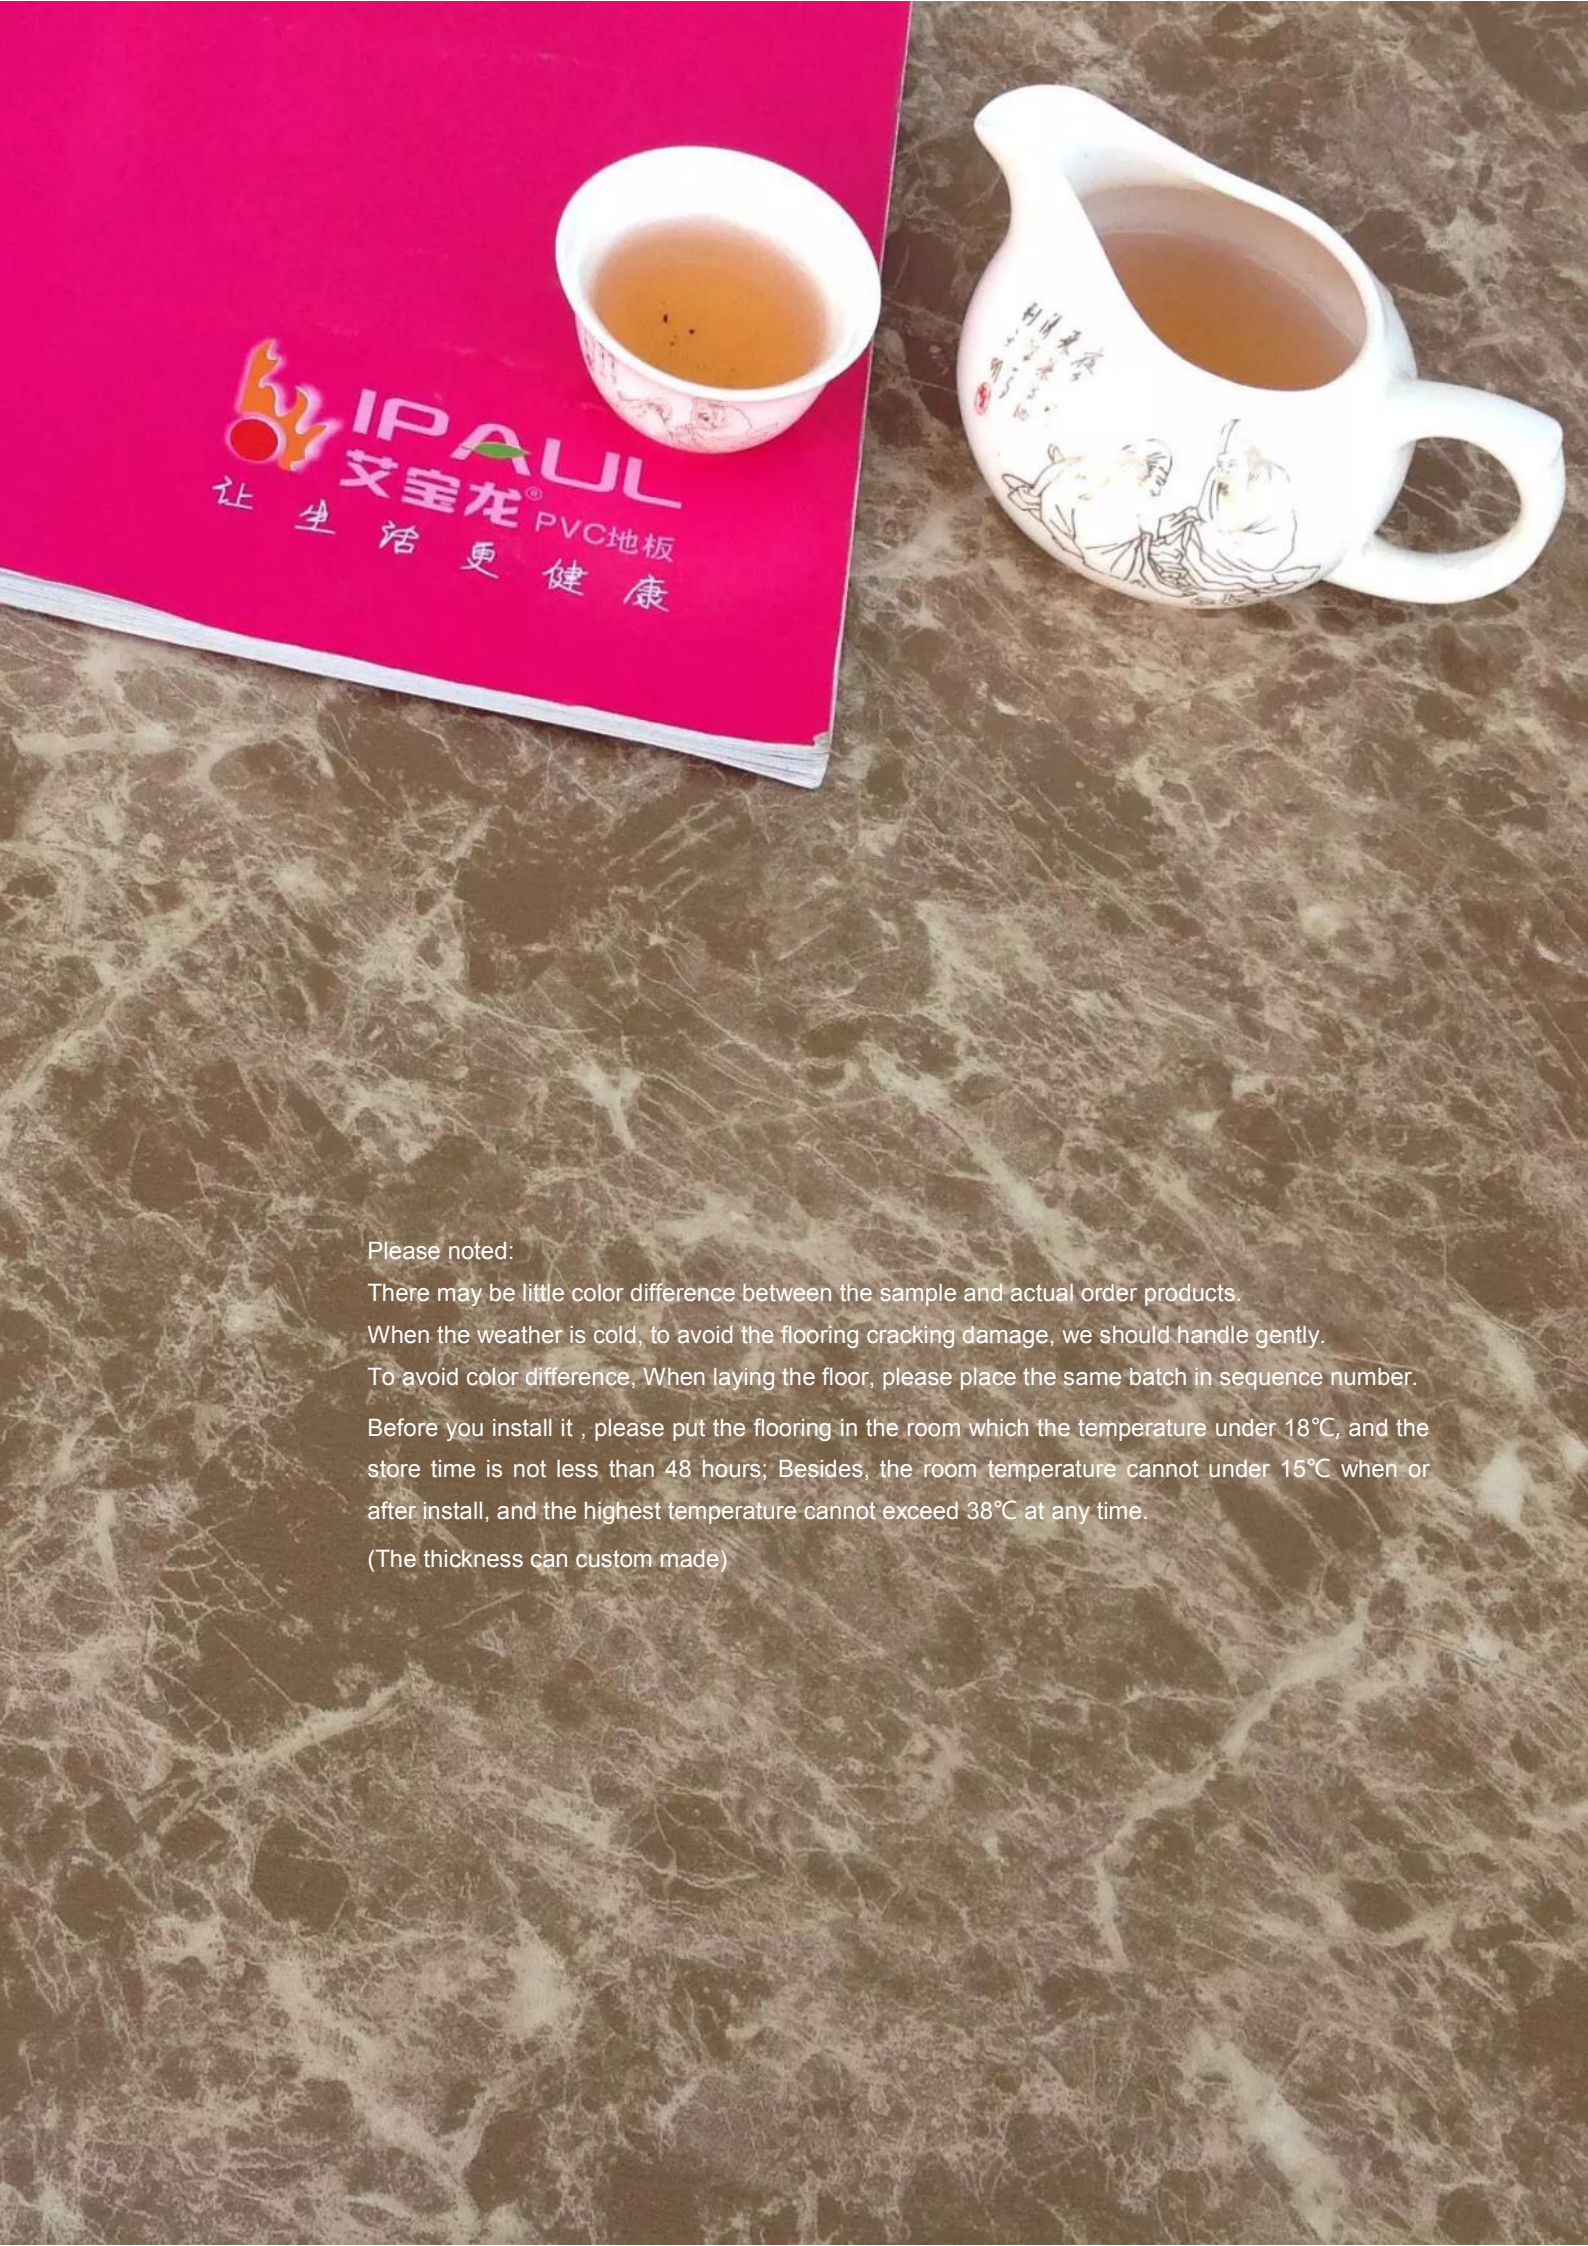

**IPALUL**  
艾宝龙® PVC地板  
让生活更健康

Please noted:

There may be little color difference between the sample and actual order products.

When the weather is cold, to avoid the flooring cracking damage, we should handle gently.

To avoid color difference, When laying the floor, please place the same batch in sequence number.

Before you install it , please put the flooring in the room which the temperature under 18°C, and the store time is not less than 48 hours; Besides, the room temperature cannot under 15°C when or after install, and the highest temperature cannot exceed 38°C at any time.

(The thickness can custom made)