




MIPOLAM® TROPLAN PLUS MIPOLAM® 托普兰加强

gerflor.com
gerflor.cn

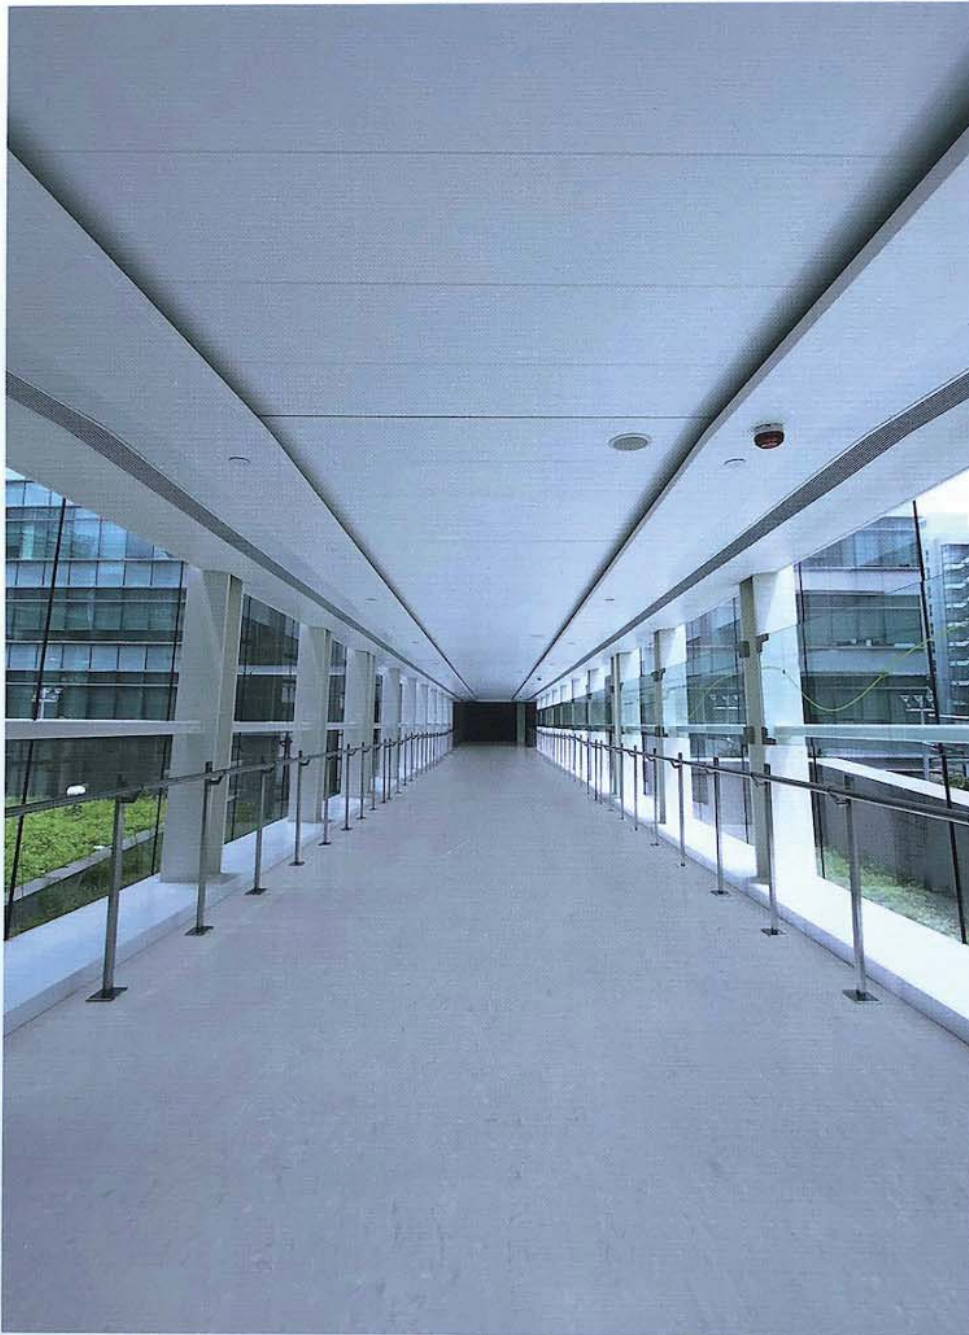

NEW

Gerflor
the flooring group

Performances and benefits 产品表现



Excellent abrasion resistance
优异的耐磨性能



Matt finish surface: enhanced design & colour
哑光表面, 增强设计感, 让图案和花色更持久




Available in 2 m sheet
可供2米宽卷材



Homogeneous vinyl flooring suitable for medium to heavy duty traffic areas
在超大人流量得区域保证地板的卓越表现



Flexible flooring, easy to install & weld
高弹性同质透心地板, 安装便捷



Directional design available in 18 references
18个花色可供选择

FEWER VOC'S, BETTER INDOOR AIR QUALITY 更低的VOC排放, 更好的室内空气质量



COMPOSITION 100% REACH compliant 成份100%符合 REACH规定

- FREE of formaldehyde
不含甲醛
- FREE of heavy metals
不含重金属
- FREE of solvent
不含溶剂



WELLNESS 健康

- Health 健康
- Antibacterial activity
(inhibits growth > 99 %)
有效抑菌(抑菌率>99%)



INDOOR AIR QUALITY 室内空气质量

- TVOC emissions 100 times lower than norm requirements (TVOC <10 µg/m³ after 28 days)
TVOC 排放低于标准 100 倍 (28 天后 TVOC 排放 <10µg/m³)
- Floorscore certified
Floorscore 认证
- M1 certified
M1 认证
- Comply with AgBB protocol
符合 AgBB 规定
- No formaldehyde emission
不含甲醛



RECYCLABILITY 可循环

- 100 % recyclable product
产品100%可回收




RECYCLED CONTENT 成分环保

- 100 % REACH compliant recycled content
100% 符合REACH规定

INSTALLATION 安装

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. Where applicable, the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using Gerflor® matching welding rod.

应按照当地标准进行安装。铺设地板前, 应确保地面平滑、坚硬、清洁和干燥。如有需要, 应在地面上铺设一层有效的防潮薄膜。安装地板前, 应提前24小时将地板材料放置在18-24°C室温内适应环境。所有接缝口应选用Gerflor®之配套焊条热焊处理。

 Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

橡胶会在乙烯基地板上留下无法擦拭的污点: 请勿在PVC地板上使用橡胶背衬, 用PVC或者聚酰胺(尼龙)材质替代橡胶家具背衬。

MAINTENANCE 维护

No emulsion dressing is required. Maintenance should be carried out regularly to retain in the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.


铺装之后终生无需打蜡。定期进行维护以使其保持外观整洁和耐用性。定期清扫和使用中性清洁剂湿擦来维护地板。或者使用具有精细喷雾垫的清洗机进行大面积地面的清洗。



EVERCARE™

34-43

MIPOLAM® TROPLAN PLUS MIPOLAM® 托普兰加强

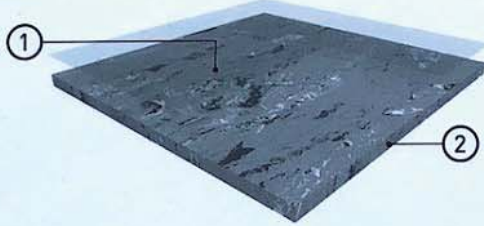

- ① EVERCARE™ special maintenance treatment
EVERCARE™ 特殊维护处理
- ② Compacted calendered homogeneous floorcovering
加强型致密结构

- High performance flexible homogeneous multipurpose flooring
高品质多功能的同质透心地板
- Available in sheet
可供卷装选择
- Directional design
有方向性设计
- EVERCARE™ special maintenance treatment: for ease of maintenance
EVERCARE™ 特殊维护处理, 保养方便
- Densely compacted surface for improved wear maintenance
加强型致密结构提高耐磨性和容易保养
- Anti-bacterial and fungicidal
具有抗菌和防霉的功能
- Antistatic 抗静电

Compacted sheet, without foam backing
致密卷材, 无泡沫背层

EVERCARE™ SPECIAL MAINTENANCE TREATMENT


EXCLUSIVE PATENTED TECHNOLOGY BY GERFLOR®
EVERCARE™ 特殊维护处理, 独一无二的洁福®专利技术

THE BEST CHEMICAL STAIN RESISTANCE SPECIAL MAINTENENCE TREATMENT

极其优异的抗化学性特殊维护处理

BY GERFLOR : Treatment durability

洁福®. 处理技术: 持久性处理技术




Gerflor®: Even thickness
洁福®: 厚度均匀



100% non-porous surface
Water-repellent effect
100% 无孔隙, 有效防止水渗漏

Other non-treated floor covering
其它表面处理的产品




Missing treatment and uneven thickness
竞争对手: 未经处理厚度不均匀



Non-treated product
无处理产品

SIMPLE & EASY STAIN REMOVAL

易于去除污渍

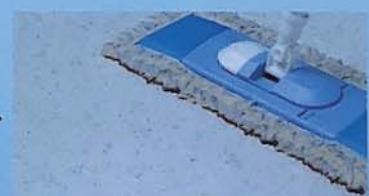



1009 Light Grey



1010 Grey



1002 Beige



1059 Blue Grey



1003 Light Ocre



1040 Dark Grey



1035 Ocre



1032 Yellow



1055 Apricot





1004 Earth



1007 Green



1033 Brown



1037 Medium Green



1006 Blue



1057 Dark Green



1056 Dark Blue



1036 Medium Blue



1060 Anthracite

MIPOLAM® TROPLAN PLUS
MIPOLAM® 托普兰加强

DESCRIPTION 规格

Total thickness 总厚度	ISO 24346 [EN 428]	mm	2
Weight 重量	ISO 23997 [EN 430]	g/m ²	3100
Width / Length of sheet 卷宽 / 卷长	ISO 24341 [EN 426]	cm / lm	200 / 20

CLASSIFICATION 类别

Norm / Product specification 产品规范	-	-	ISO 10581 [EN 649]
European classification 欧洲标准	ISO 10874 [EN 685]	class	34 - 43
Fire rating 防火等级	EN 13 501-1	class	Bfl-s1
	GB 8624 - 2012	-	B1(B-s1,t0)
Toxic testing 有毒有害物质检测	GB 18586-2001	-	合格
Static electrical propensity 抗静电性	EN 1815	KV	<2
Electrical resistance 抗电阻性	EN 1081	Ω	10 ⁹ -10 ¹⁰
Slip resistance dry 干防滑性	EN 13893	-	≥0.3
Slip resistance wet 防湿滑性	DIN 51130	class	R9

PERFORMANCES 性能

Wear resistance 耐磨性	EN 660.2	mm ³	≤2.0
Wear group 耐磨等级	EN 649	group	T
Type binder content 粘合剂等级	ISO 10581	type	II
Dimensional stability 尺寸稳定性	ISO 23999 [EN 434]	%	≤ 0.4
Castor chair test 椅子脚轮测试	ISO 4918 [EN 425]	-	OK
Thermal conductivity 热传导性	ISO 10456 [EN 12524]	W/(m.K)	=0.25
Colour fastness 颜色稳定性	ISO 105 - B02	degree	≥ 6
Chemical products resistance 抗化学性	ISO 26987 [EN 423]	-	OK
Anti-bacterial and fungicidal treatment 抗菌防霉处理	-	-	OK
Special maintenance treatment 特殊维护处理	-	-	EVERCARE™
Color number 颜色数量	-	-	18

ENVIRONMENT / INDOOR AIR QUALITY 环保 / 室内空气质量

TVOC after 28 days 28天后TVOC*排放量	ISO 16000 - 6	µg/m ³	<10
Certification 证书	-	-	Floorscore®

CE MARKING CE标志

CE	EN 14041	-	
----	----------	---	--

* TVOC: 挥发性有机化合物总排放量

MIPOLAM® TROPLAN PLUS is a flexible homogeneous calendered compacted floorcovering in sheet, with directional design color dyed as a raw mixture to ensure color throughout the thickness. Its surface is densely compacted for improved wear and ease of maintenance. It benefits from Evercare™ which has the highest chemicals resistance on the market for durable appearance and cleanliness of the product. It is probably the best treatment against chemicals ever on homogeneous flooring. No wax for life!

MIPOLAM® TROPLAN PLUS features bacteriostatic and fungistatic treatment. The flooring complies with the EN 649 (34-43) and has a Group T wear rating. It is suitable for heavy traffic areas.

MIPOLAM® 托普兰加强 是一种经过加压处理的同质透心卷材地板，有方向性设计，其彩色碎片与天然混合物经过特别处理后均匀的分布在地板内，加上其色彩丰富，适合多方面的设计。其表面层经过加压/加密度处理后达到提高耐磨和容易保养的效果。采用Evercare™ 特殊维护处理，提供了卓越的抗刮痕性和耐化学物质性能（比如抗碘酒污染），堪称目前同质透心地板工艺中的翘楚。铺装后终生无需打蜡！

MIPOLAM® 托普兰加强 具有抗菌和防霉的特点。该地板符合 EN 649 (34-43) 项规定，其耐磨性达到Group T 的标准，适合于人流量大的地方使用。

MIPOLAM® TROPLAN PLUS, LESS SPEAKING FOR MORE ACTIONS MIPOLAM® 托普兰加强, 说得更少, 做得更多



COMPOSITION
100% REACH compliant
成份100%符合
REACH规定



**INDOOR
AIR QUALITY**
室内空气质量



**RECYCLED
CONTENT**
成分环保



RECYCLABILITY
100%
产品100%可回收



WELLNESS
健康



随时找到 Gerflor. 洁福。

所有的洁福产品，全屏模式的颜色，
相关文件和 MY TARALAY 应用程序
请登陆 <http://m.gerflor.com>
或者 «Mobiletag» 应用程序，
请微信扫码，关注Gerflor. 洁福。



洁福 Gerflor

theflooringroup

GERFLOR CHINA 洁福中国

SHANGHAI OFFICE 上海办公室 Tel. / 电话: + 86-21-63578818

BEIJING OFFICE 北京办公室 Tel. / 电话: + 86-10-65836986