

The Original
MIPOLAM 1937

MIPOLAM® 150

PUR PROTECT

gerflor.com
gerflor.cn



NEW

Gerflor®
theflooringgroup

MIPOLAM® 150

PUR PROTECT



PUR Protect

34-43



2037



1003



1004



2093



1005



1006



Compact sheet, without foam backing
致密卷材，无泡沫背层



2091



1014



2038



1010



2049



1013



1007



Compact sheet, without foam backing
致密卷材，无泡沫背层



2092



2095



2046



2034



2048



2096




2047



2097



2094

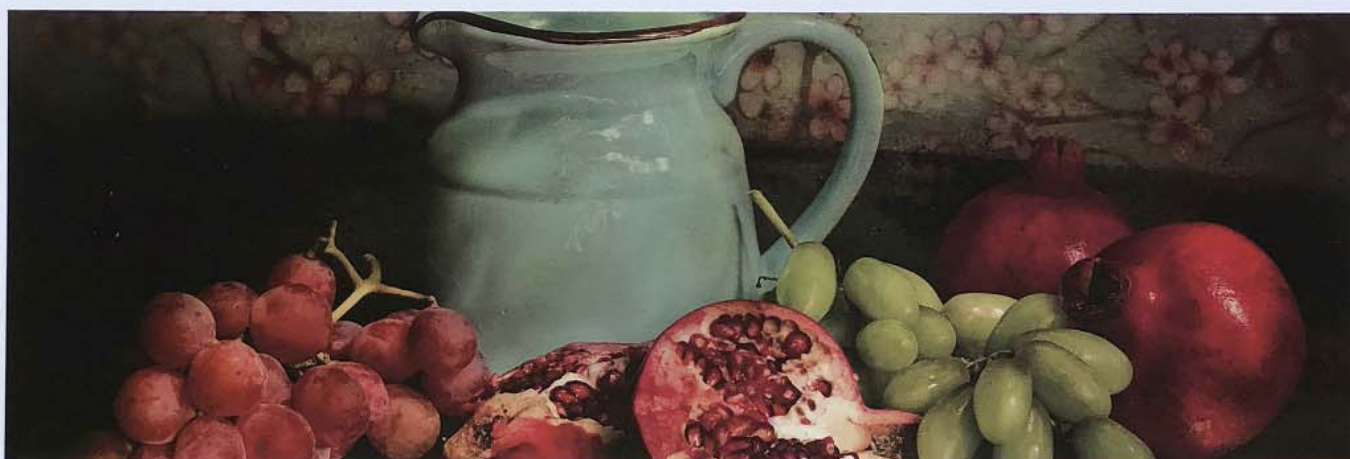

Compact sheet, without foam backing
致密卷材，无泡沫背层

MIPOLAM® 150

DESCRIPTION 规格

Total thickness 总厚度	ISO 24346 [EN 428]	mm	1.5 ⁽¹⁾	2
Weight 重量	ISO 23997 [EN 430]	g/m ²	2500	3300
Width / Length of sheet 卷长 / 卷宽	ISO 24341 [EN 426]	cm / lm	200 / 20	

CLASSIFICATION 类别

Norm / Product specification 产品规范	-	-	ISO 10581 [EN 649]	
European classification 欧洲标准	ISO 10874 [EN 685]	class	23 - 31 / 34 - 43	
Fire rating 防火等级	EN 13 501-1	class	Bfl-s1	
	GB 8624 - 2012	-	B1(B-s1,t0)	
Toxic testing 有毒有害物质检测	GB 18586-2001	-	合格	
Static electrical propensity 抗静电性	EN 1815	KV	<2	
Electrical resistance 抗电阻性	EN 1081	Ω	10 ⁹ -10 ¹⁰	
Slip resistance dry 防干滑性	EN 13893	-	≥0.3	
Slip resistance wet 防湿滑性	DIN 51130	class	R9	

PERFORMANCES 性能

Wear resistance 耐磨性	EN 660.2	mm ³	≤7.5	
Wear group 耐磨等级	EN 649	group	M	
Type binder content 粘合剂含量	ISO 10581	type	II	
Dimensional stability 尺寸稳定性	ISO 23999 [EN 434]	%	≤ 0.4	
Residual indentation 残余凹陷度	ISO 24343-1 [EN 433]	mm	≤0.05	
Castor chair test 椅子脚轮测试	ISO 4918 [EN 425]	-	OK	
Thermal conductivity 热传导性	ISO 10456 [EN 12524]	W/(m.K)	≤0.25	
Colour fastness 颜色稳定性	ISO 105 - B02	degree	≥ 6	
Chemical products resistance 抗化学	ISO 26987 [EN 423]	-	OK	
Anti-bacterial and fungicidal treatment 抗菌防霉处理	-	-	OK	
Special maintenance treatment 特殊维护处理	-	-	PUR Protect	
Color number 颜色数量	-	-	22	

ENVIRONMENT / INDOOR AIR QUALITY 环保 / 室内空气质量

TVOC after 28 days 28天后TVOC ⁽²⁾ 排放量	ISO 16000 - 6	μg/m ³	<10	
Certification 证书	-	-	Floorscore®	

CE MARKING CE标志

CE	EN 14041	-		
----	----------	---	---	--

(1) Special order, minimum quantities needed 特殊订单, 需有最低起订量 (2) TVOC: 挥发性有机化合物总排放量

MIPOLAM® 150 is a durable, high performing flexible homogeneous multipurpose flooring suitable for most types of heavy traffic areas. It benefits from PUR Protect special maintenance treatment with excellent cleaning characteristics, improved resistance to scratching and scuffing. MIPOLAM® 150 is recommended for public, institutional and commercial buildings where ease of maintenance and long life under heavy traffic are required.

MIPOLAM® 150 是一种经久耐用的高品质多功能的同质透心弹性地板, 适用于各种人流量大的公共场合。该产品经过 PUR Protect 特殊维护处理, 提升了抗刮痕性, 更耐鞋底刮擦。非常易于养护。

MIPOLAM® 150 可推荐使用于人流量大, 使用时间长, 需要便捷维护保养的公共场所和商用楼宇等区域。

MIPOLAM® 150, **LESS SPEAKING FOR MORE ACTIONS** MIPOLAM® 150, 说得更少, 做得更多



COMPOSITION
100% REACH compliant
成份100%符合
REACH规定



**INDOOR
AIR QUALITY**
室内空气质量



**RECYCLED
CONTENT**
成分环保



RECYCLABILITY
100%
产品100%可回收



WELLNESS
健康



随时找到 Gerflor® 洁福®

所有的洁福产品, 全屏模式的颜色,
相关文件和 MY TARALAY 应用程序
请登陆 <http://m.gerflor.com>
或者 «Mobiletag» 应用程序,
请微信扫码, 关注Gerflor® 洁福®



洁福 Gerflor®

theflooringgroup

GERFLOR CHINA 洁福中国

SHANGHAI OFFICE 上海办公室 Tel. / 电话: +86-21-63578818

BEIJING OFFICE 北京办公室 Tel. / 电话: +86-10-65836986

Performances and benefits 产品表现



Excellent abrasion resistance
良好的耐磨性能



Matt finish surface: enhanced design & colour
哑光表面, 增强设计感, 让图案和花色更持久



Available in 2 m sheet
可供2米宽卷材



Homogeneous vinyl flooring suitable for medium to heavy duty traffic areas
在超大人流量区域保证地板的卓越表现



Flexible flooring, easy to install & weld
高弹性同质透心地板, 安装便捷



Directional design available in 22 references
22个花色可供选择

FEWER VOC'S, BETTER INDOOR AIR QUALITY 更低的VOC排放, 更好的室内空气质量



COMPOSITION 100% REACH compliant 成份100%符合 REACH规定

- FREE of formaldehyde
不含甲醛
- FREE of heavy metals
不含重金属
- FREE of solvent
不含溶剂



WELLNESS 健康

Health 健康

- Antibacterial activity
(inhibits growth > 99 %)
有效抑菌(抑菌率>99%)



INDOOR AIR QUALITY 室内空气质量

- TVOC emissions 100 times lower than norm requirements (TVOC < 10 µg/m³ after 28 days)
TVOC 排放低于标准 100 倍 (28 天后 TVOC 排放 < 10µg/m³)
- Floorscore certified
Florescore 认证
- M1 certified
M1 认证
- Comply with AgBB protocol
符合 AgBB 规定
- No formaldehyde emission
不含甲醛



RECYCLABILITY 可循环

- 100 % recyclable product
产品100%可回收



RECYCLED CONTENT 成分环保

- 100 % REACH compliant recycled content
100% 符合REACH规定

INSTALLATION 安装

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using Gerflor® matching welding rod. 应按照当地标准进行安装。铺设地板前, 应确保地面平滑、坚硬、清洁和干燥。如有需要, 应在地面上铺设一层有效的防潮薄膜。安装地板前, 应提前24小时将地板材料放置在18-24°C室温内适应环境。所有接缝口应选用Gerflor®之配套焊条热焊处理。

MAINTENANCE 维护

No wax is needed right after installation. Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning. 铺装之后可以不必立即打蜡。定期进行维护以使其保持外观整洁和耐用性。定期清扫和使用中性清洁剂湿擦来维护地板。或者使用具有精细喷雾垫的清洗机进行大面积地面的清洗。