


TRANSIT CLASSIC™ 传递经典™

gerflor.com
gerflor.cn

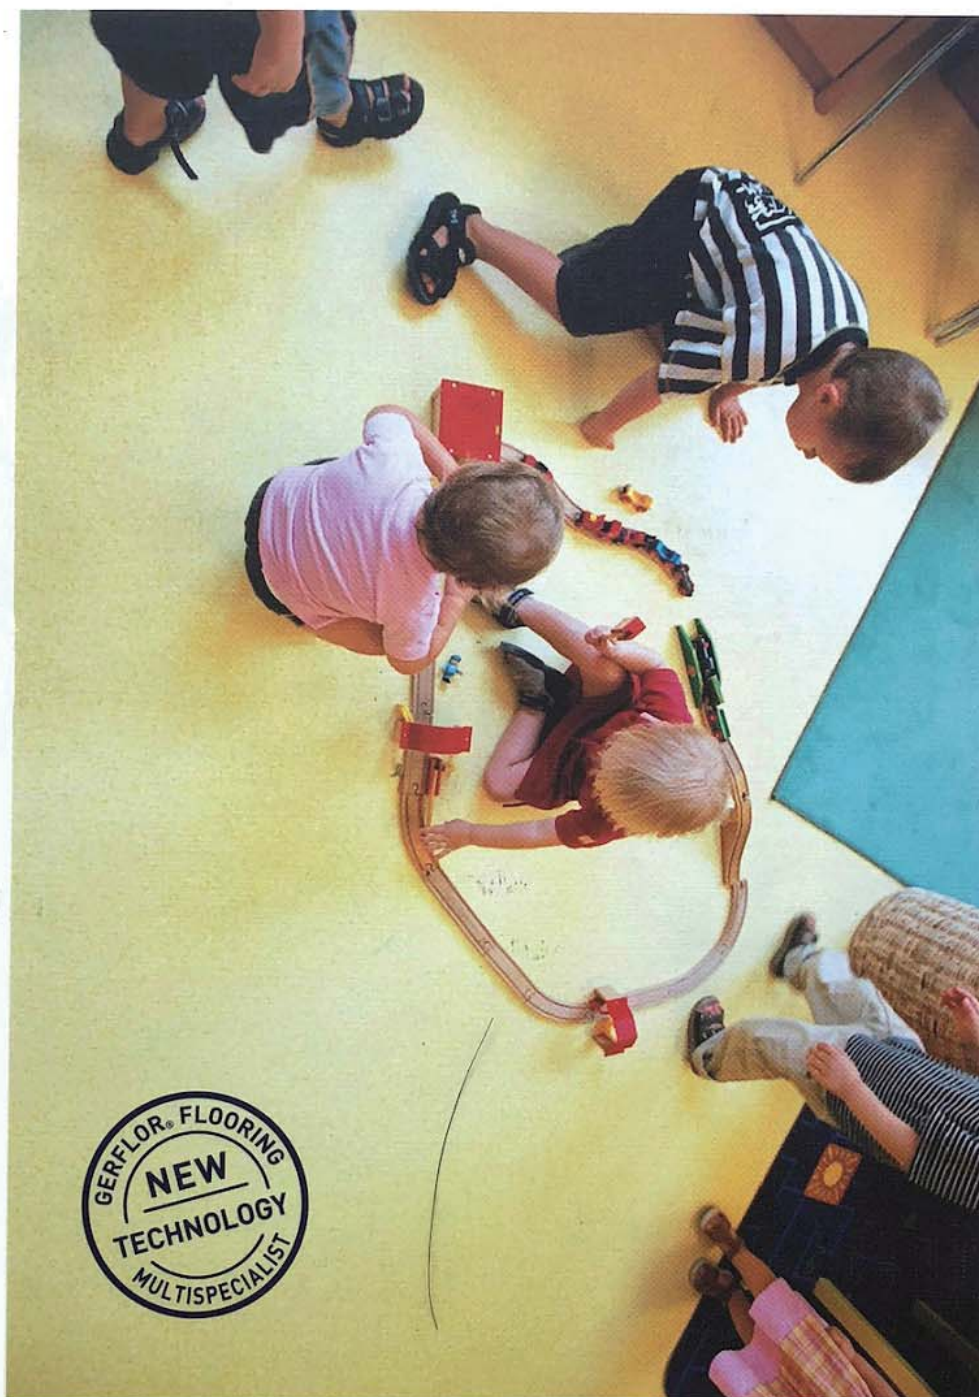

Gerflor®
theflooringgroup

TRANSIT CLASSIC™ TEXTURA / COLUMBO / WOOD is a multilayered compact vinyl floor covering, available in 2m width sheet, with a group T wear rating. The product comprises a printed design that is protected by a transparent wear layer and a compact backing with fiber glass layer, which resists against static or dynamic perforation under rolling loads and provides good dimensional stability.

TRANSIT CLASSIC™ TEXTURA / COLUMBO / WOOD is treated with PUR Protect special maintenance treatment with high resistance to scratching, scuffing & easy cleaning, and Sanosol treated throughout the thickness to guard against bacterial and fungicidal contamination. It has no DOP, no heavy-metal, which is friendly to health and environment, recommended for education, office, retail, hospital and institutional buildings.

传递经典™ 特斯佳 / 哥伦布 / 木纹 是多层致密 PVC 地面材料, 可供2米宽规格的卷材, 耐磨等级为 T 级。表面花纹图案在透明耐磨层的保护之下经久不变。玻璃纤维加强层及致密背层使产品具有优异的耐压性能, 可抵抗静、动滚轮荷载, 尺寸稳定不易变形。

传递经典™ 特斯佳 / 哥伦布 / 木纹 经过 PUR Protect 特殊维护处理以及 Sanosol 抗菌防霉处理, 出色的抗刮痕性及耐鞋底刮擦性能, 易于清洁保养。该产品无DOP, 无重金属, 健康环保, 适用于教育、办公、零售、医院和公共建筑等。

INSTALLATION 安装

Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor® matching weld rod.

应按照当地标准进行安装。铺设地板前, 应确保地面平滑、坚硬、清洁和干燥。如有需要, 应在地面上铺设一层有效的防潮薄膜。安装地板前, 应提前24小时将地板材料放置在18-24°C室内温度适应环境。所有接缝口应选用Gerflor®之配套焊条热焊处理。

MAINTENANCE 维护

No acrylic emulsion (wax) is needed after installation. Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, more intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

铺装之后可以不必使用丙烯酸乳液(蜡水)。定期进行维护以使其保持外观整洁和耐用性。定期清扫和使用中性清洁剂湿擦来维护地板。或者使用具有精细喷雾垫的清洗机进行大面积地面的清洗。

⚠ Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

橡胶会在乙烯基地板上留下无法擦拭的污点。请勿在PVC地板上使用橡胶背衬, 用PVC或者聚酰胺(尼龙)材质替代橡胶家具背衬。

TEXTURA / COLUMBO / WOOD 特斯佳 / 哥伦布 / 木纹

DESCRIPTION 规格

Total thickness 总厚度	EN 428	mm	2.0	2.2
Thickness of wearlayer 耐磨层厚度	EN 429	mm	0.3	0.4
Width of sheet 卷宽	EN 426	cm	200	200
Length of sheet 卷长	EN 426	lm	20	20

CLASSIFICATION 类别

Norm / Product specification 产品规范	-	-	EN 649	EN 649
European classification 欧洲标准	EN 685	class	23-31	32-41
Fire rating [EN] 防火等级(欧标)	EN 13 501-1	class	Bfl-s1	Bfl-s1
Fire rating [GB] 防火等级(国标)	GB 8624-2012	class	B1(B-s1,t0)	B1(B-s1,t0)
Toxic testing 有毒有害物质检测	GB 18586-2001	-	合格	合格
Static electrical propensity 抗静电性	EN 1815	KV	< 2	< 2
Slip resistance wet 防滑湿性	DIN 51 130	class	R9	R9

PERFORMANCE 性能

Abrasion resistance 耐磨性	EN 660.2	mm ³	≤ 2	≤ 2
Abrasion group 耐磨等级	EN 649	group	T	T
Dimensional stability 尺寸稳定性	EN 434	%	≤ 0.4	≤ 0.4
Residual indentation 残余凹陷度	EN 433	mm	≤ 0.1	≤ 0.1
Castor chair test 椅子脚轮测试	EN 425	-	OK	OK
Thermal conductivity 热传导性	EN 12 524	W/(m.K)	0.25	0.25
Colour fastness 颜色稳定性	ISO 105 - B02	degree	≥ 6	≥ 6
Chemical products resistance 抗化学性	EN 423	-	OK	OK
Anti-bacterial and fungicidal 抗菌防霉处理	-	-	Sanosol	Sanosol
Special maintenance treatment 特殊维护处理	-	-	PUR Protect	PUR Protect
TVOC* after 28 days 28天后TVOC排放量	ISO 16000 - 6	µg/m ³	< 100	< 100

CE MARKING CE 标识

CE	EN 14041				
----	----------	--	--	--	--

*TVOC: 挥发性有机化合物总排放量
Gerflor® has a policy of continuous product improvement, it reserves the right to change design and specifications without notice.
洁福® 一直致力于产品和技术的不更新, 我们保留对产品设计及技术说明的更新且恕不另行通知的权利。



Committed to sustainable development
致力于可持续发展



Gerflor®
theflooringgroup



 2 m	23-31 32-41	PUR Protect	Sanosol	 100% recyclable
--	----------------	-------------	---------	---

TEXTURA / COLUMBO / WOOD 特斯佳 / 哥伦布 / 木纹



- ① PUR Protect special maintenance treatment
PUR Protect 特殊维护处理
- ② Transparent wear layer 透明耐磨层
- ③ Printed design 印刷设计层
- ④ Fiber glass reinforced layer 玻璃纤维加强层
- ⑤ Compact back layer 致密背层

- ☐ PUR Protect special maintenance treatment with high resistance to scratching, scuffing & easy cleaning.

PUR Protect 特殊维护处理, 出色的抗刮痕性及耐鞋底刮擦性能, 易于清洁保养。

- ☐ Transparent wear layer with printed design, highest durability.

透明耐磨层, 印刷花纹设计, 经久耐用。

- ☐ Compact backing with fiber glass reinforced layer against static or dynamic perforation under rolling loads with good dimensional stability.

玻璃纤维加强层及致密背层, 优异的耐压痕性能, 可抵抗静、动滚轮载荷, 尺寸稳定不易变形。

- ☐ Sanosol treated throughout the thickness to guard against bacterial and fungicidal contamination. 经过Sanosol对地板进行全厚度处理, 以防止细菌和霉菌污染。

- ☐ No DOP, no heavy-metal, friendly to health and environment. 无DOP, 无重金属, 健康环保。

- ☐ Recommended for education, office, retail, hospital and institutional buildings. 适用于教育、办公、零售、医疗和公共建筑等。



Compact sheet, without foam backing
致密卷材, 无泡沫背层

WOOD 木纹



0401 Frontenac-Light yellow



0501 Walnut-Yellow grey



0502 Walnut-Dark brown



TEXTURA 特斯佳



0309 Ash



0303 Chocolat



0301 Lagon



0310 Acier



0304 Cream



0302 Forest



0311 Smoke



0306 Gold



0307 Ciel



0312 Ruby



0305 Cappuccino



0308 Ocean



COLUMBO 哥伦布



0207 Ficus



0203 Lin



0211 Chrome




0208 Green



0201 Bruyere



0210 Jais

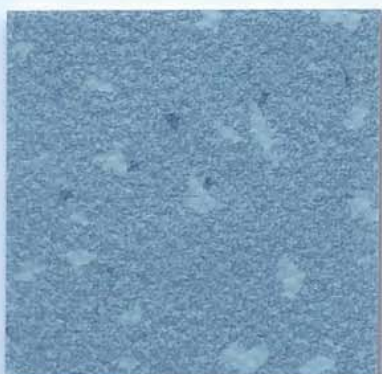

0205 Myosotis



0204 Orange




0209 Ebene



0206 Dark blue



0202 Mid brown

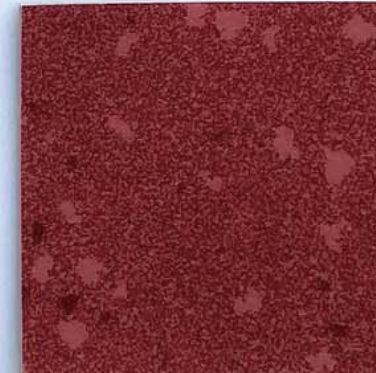

0212 Red

