


TARALAY EMOTION™ 柏莱灵动™


gerflor.com
gerflor.cn

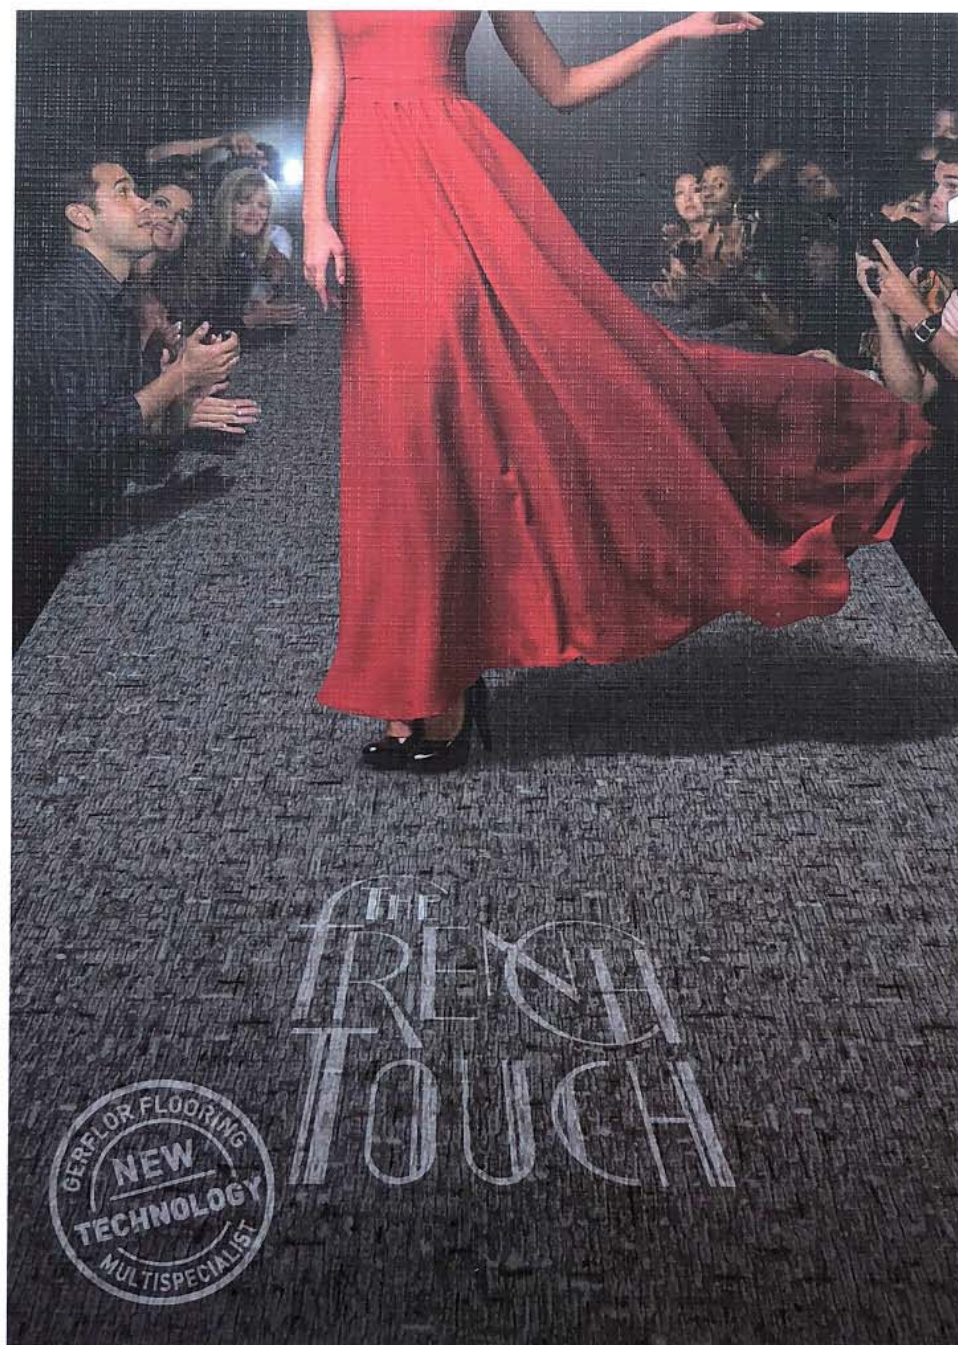

Gerflor®
theflooringgroup

 2 m	34-43	Protecsol®	Sanosol	 100% recyclable
---	-------	------------	---------	---

BORG0 博格/ COUTURE 特迪/ PANAME 灰岩/ WOOD 木纹

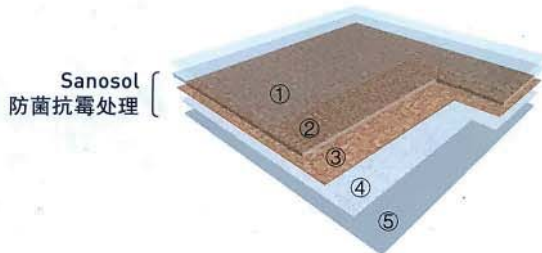

① Protecsol® special maintenance treatment
Protecsol® 特殊维护处理

② Transparent wear layer 透明耐磨层

③ Printed design 印刷设计层

④ Fiber glass reinforced layer 玻璃纤维加强层

⑤ Compact back layer 致密背层

☐ Protecsol® special maintenance treatment with excellent resistance to scratching, scuffing & easy cleaning.
Protecsol® 特殊维护处理，卓越的抗刮痕性及耐鞋底刮擦性能，极易清洁保养。

☐ Transparent wear layer with printed designing, highest durability.
透明耐磨层，印刷花纹设计，经久耐用。


☐ Compact backing with fiber glass reinforced layer. High resistance to static and dynamic indentation under rolling loads, and excellent dimensional stability.
玻璃纤维加强层及致密背层，优异的耐压痕性能，可抵抗静、动滚轮载荷，尺寸稳定不易变形。


☐ Sanosol treated throughout the thickness to prevent bacterial and fungicidal contamination.
经过Sanosol对地板进行全厚度处理，以防止细菌和霉菌污染。

☐ No DOP, no heavy-metal, no benzene, no formaldehyde & 100% compliant with REACH, friendly to health and environment.
无DOP、无重金属、无苯、无甲醛，100%符合欧盟REACH法规，健康环保。

☐ Recommended for high traffic area in education, office, retail, hospital and institutional buildings.
适用于人流量较大的教育、办公、零售、医疗和公共建筑等领域。

 Compact sheet, without foam backing 致密卷材，无泡沫背层

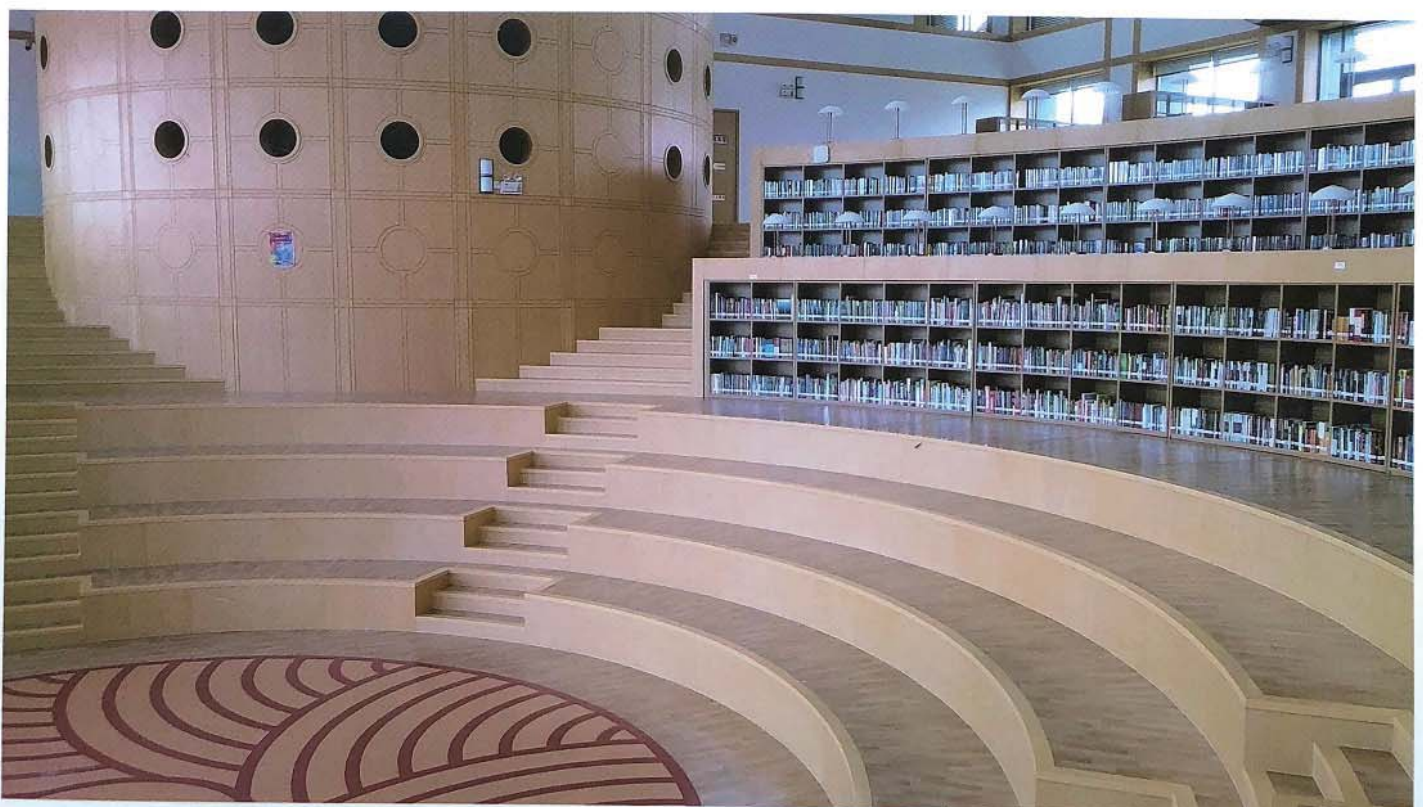

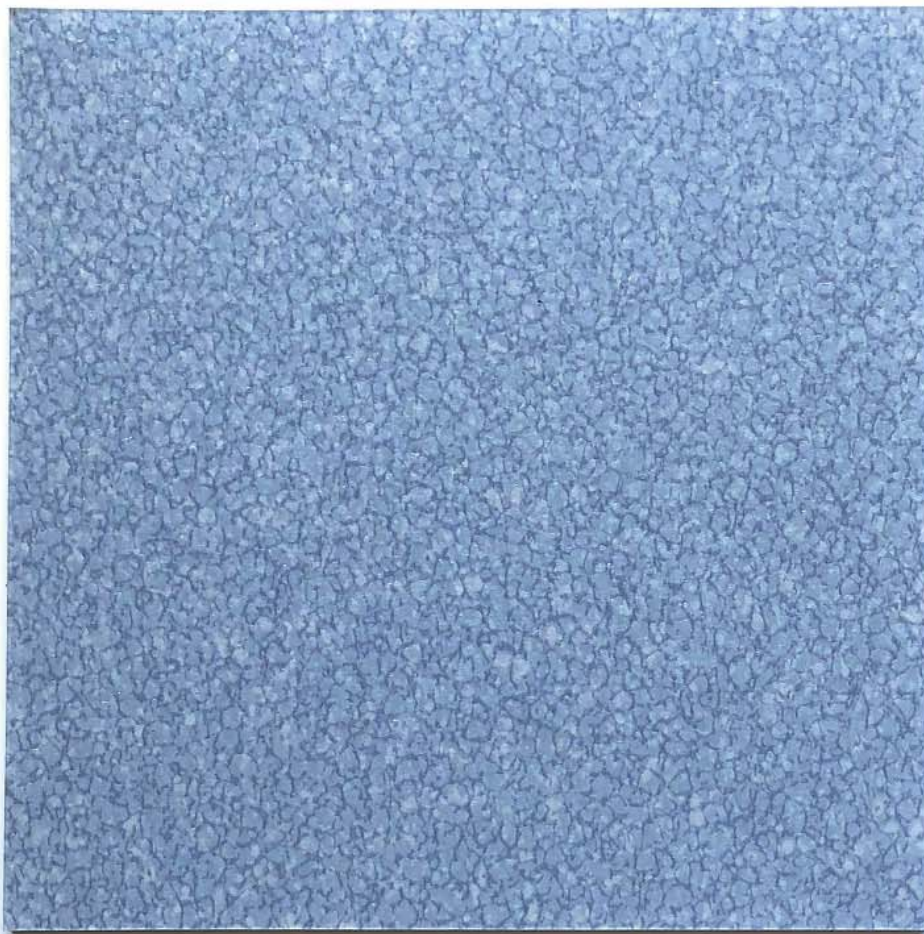

0601 Azur




0612 Sapphire



0615 Verdure


THE
FRENCH
TOUCH

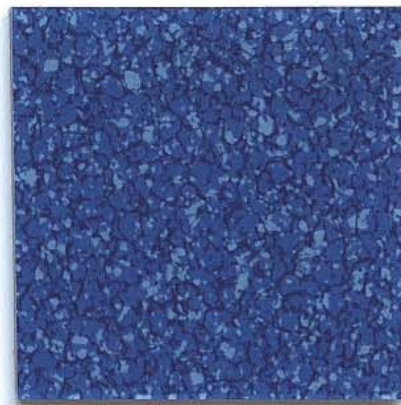

0618 Blove



0620 Grass

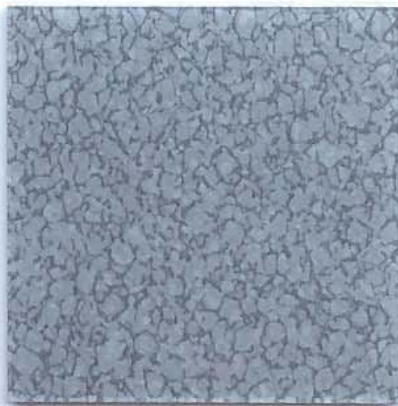

0607 Fumee



0606 Gris



0602 Sahara



0616 Beige



0619 Purple



0603 Sand



0614 Inulin



0617 Redish



0608 Pastel



0611 Pearl




0715 Corn

THE
FRENCH
TOUCH



0710 Beige

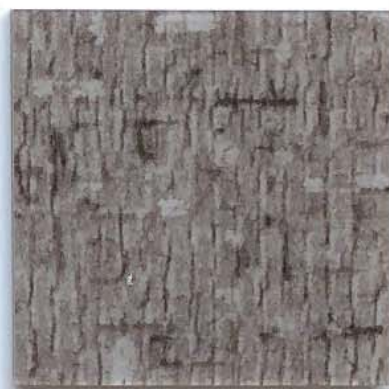

0711 Capuccino



0713 Sky




0714 Iris



0708 Dark



0701 Ivory

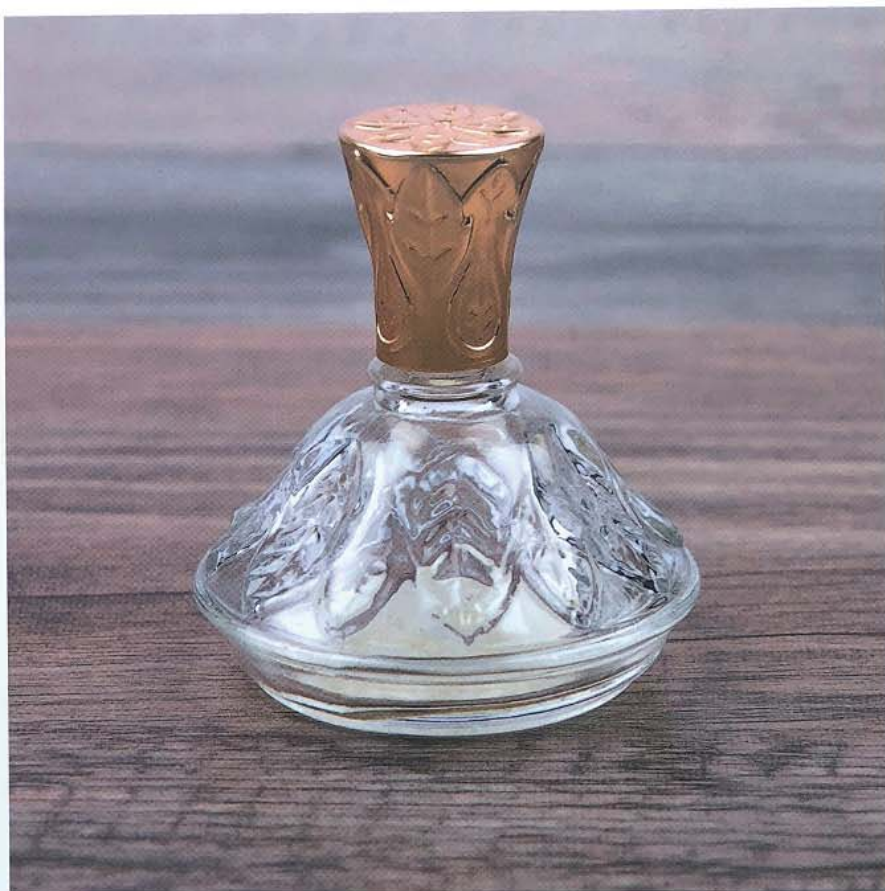

0709 Cotton



0712 Smoke



0707 Natural


THE
FRENCH
TOUCH



0808 Ocre



0802 Light Grey

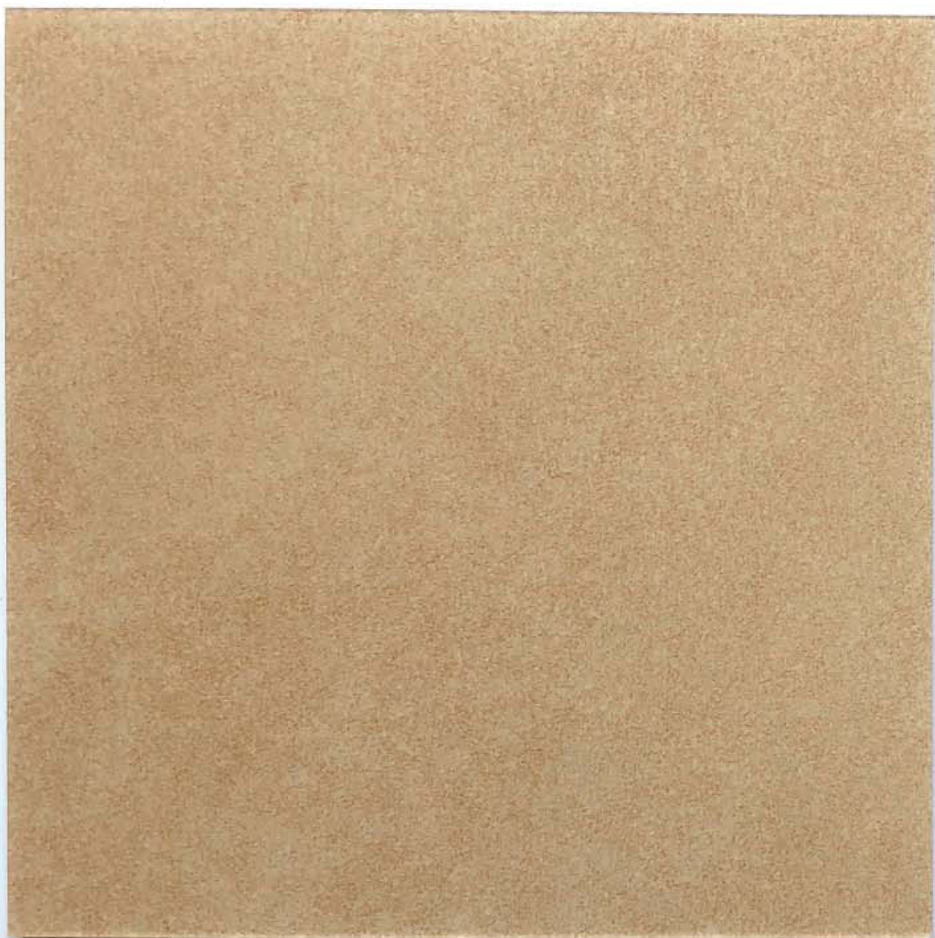

0807 Yellow



0801 Sable




0809 Clay



0805 Brown



0810 Jade

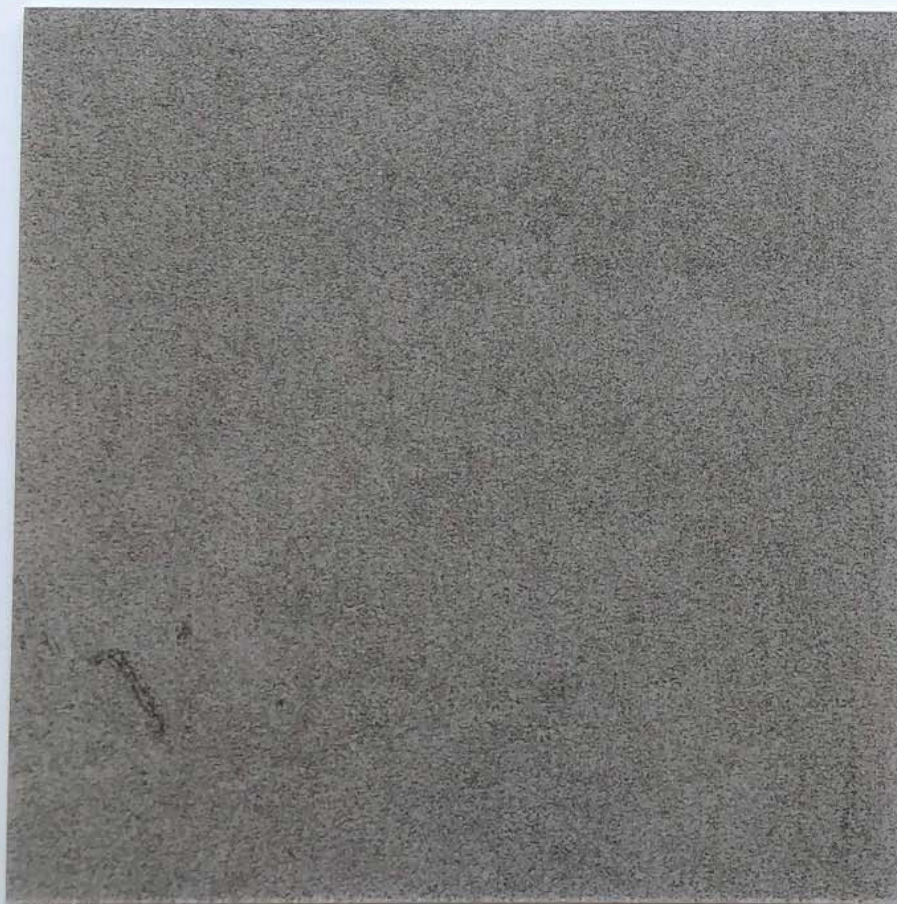

0804 Slate



0811 Calaité



0806 Anthracite

WOOD 木纹



FONTENAY - 0506 Exotic



FONTENAY - 0505 Brown



AMBOISE - 0902 Rustic



AMBOISE - 0903 Beige



AMBOISE - 0901 Black



ARCY - 1002 Taupe

WOOD 木纹



AMBOISE - 0904 White



FONTENAY - 0504 Cream



CHINON - 0402 Light



CHINON - 0403 Honey



FONTENAY - 0503 Honey



ARCY - 1003 Chamois




WOOD 木纹 CHINON



NE

rire chanter du ser et s'en aller
passager son temps
avoir envie
CROIRE EN SOI
croire en l'avenir
réussir un défi
PRENDRE DU PLAISIR
profiter de la vie

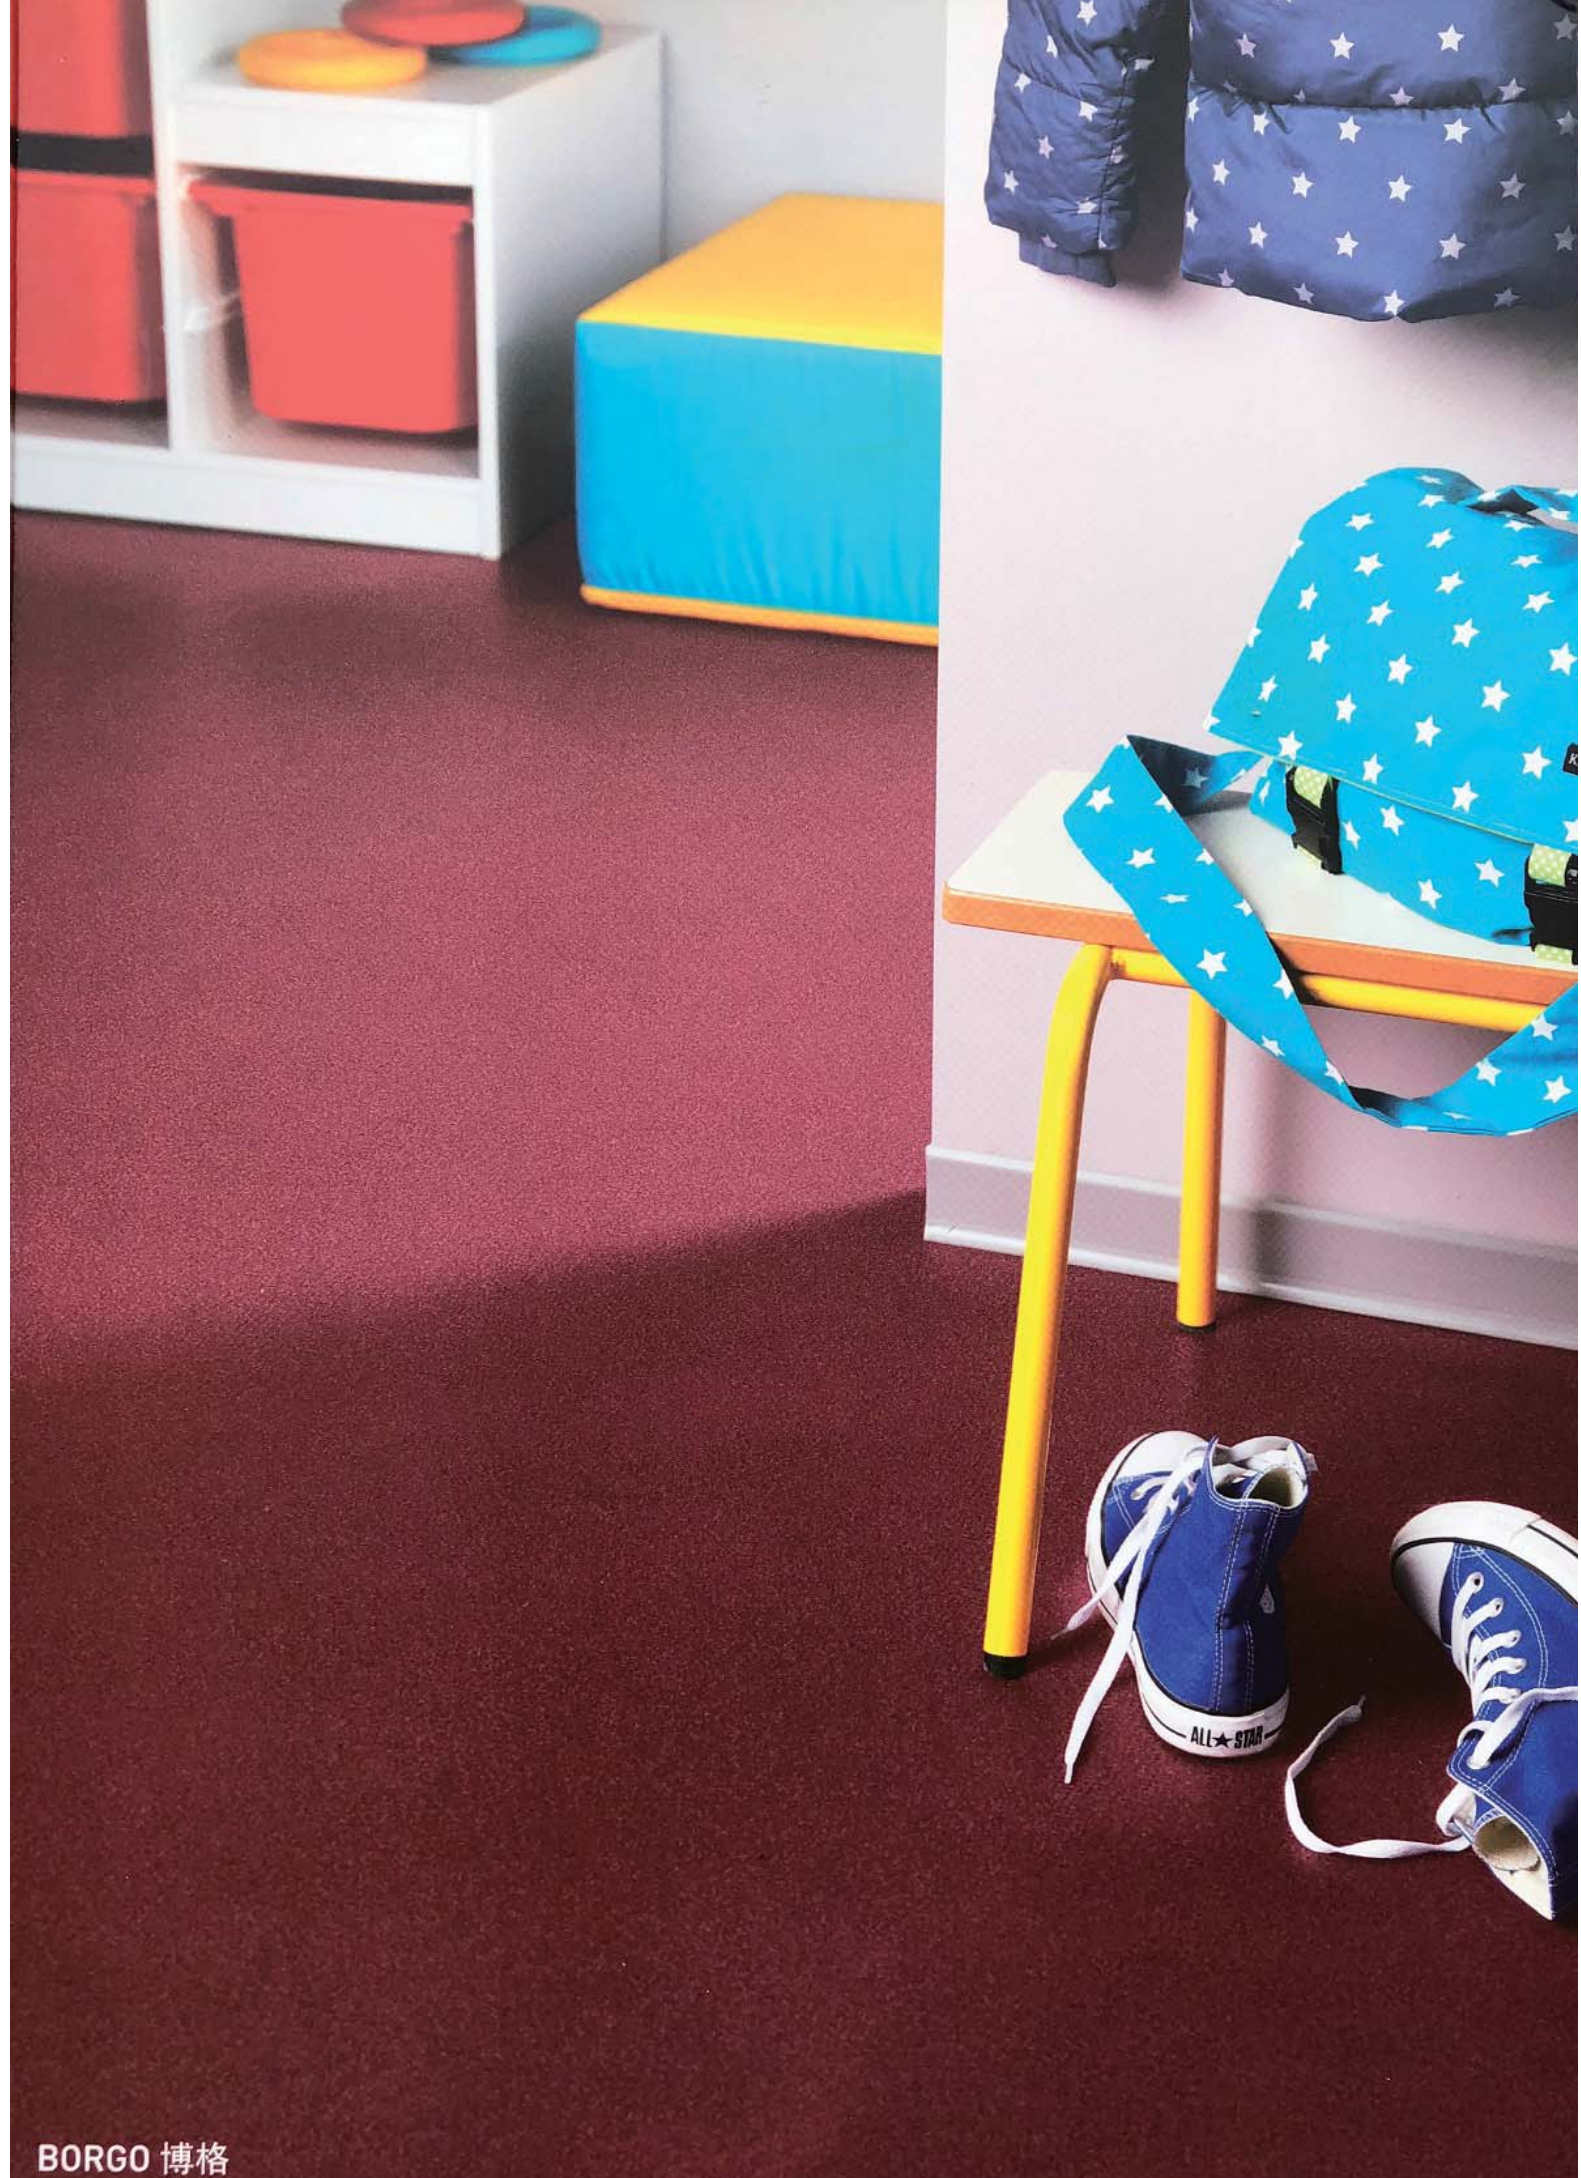

TARALAY EMOTION™ 柏莱灵动™



TARALAY EMOTION™ BORGO / COUTURE / PANAME / WOOD is a multilayered compact vinyl floor covering, available in 2m width sheet, with a group T wear rating. The product comprises a printed design protected by a transparent wear layer, and a compact backing with fiber glass reinforced layer, which resists static and dynamic indentation under rolling loads and provides excellent dimensional stability.

TARALAY EMOTION™ BORGO / COUTURE / PANAME / WOOD is treated with Protecsol® special maintenance treatment with excellent resistance to scratching, scuffing & easy cleaning, no wax for life, and Sanosol treated throughout the thickness to prevent bacterial and fungicidal contamination. It has no DOP, no heavy-metal, no benzene, no formaldehyde & 100% compliant with REACH, which is friendly to health and environment, recommended for high traffic area in education, office, retail hospital and institutional buildings.

柏莱灵动™ 博格 / 特迪 / 灰岩 / 木纹 是多层致密PVC地面材料, 可供2米宽规格的卷材, 耐磨等级为T级。表面花纹图案在透明耐磨层的保护之下经久不变。玻璃纤维加强层及致密背层使产品具有优异的耐压性能, 可抵抗静、动滚轮载荷, 尺寸稳定不易变形。

柏莱灵动™ 博格 / 特迪 / 灰岩 / 木纹 经过Protecsol® 特殊维护处理以及Sanosol抗菌防霉处理, 卓越的抗刮痕性及耐鞋底刮擦性能, 极易清洁保养, 终生免打蜡。该产品无DOP, 无重金属、无苯、无甲醛, 100%符合欧盟REACH法规, 健康环保, 适用于人流量较大的教育、办公、零售、医疗和公共建筑等领域。

TARALAY EMOTION™ 柏莱灵动™
BORGO / COUTURE / PANAME / WOOD
博格 / 特迪 / 灰岩 / 木纹

DESCRIPTION 规格

Total thickness 总厚度	ISO 24346 [EN 428]	mm	2.0	2.6
Thickness of wearlayer 耐磨层厚度	ISO 24340 [EN 429]	mm	0.7	0.7
Weight 重量	ISO 23997 [EN 430]	g/m²	2800	3800
Width of sheet 卷宽	ISO 24341 [EN 426]	cm	200	200
Length of sheet 卷长	ISO 24341 [EN 426]	lm	20	15

CLASSIFICATION 类别

Norm / Product specification 产品规范	-	-	ISO 10582 [EN 649]	ISO 10582 [EN 649]
European classification 产品分级	ISO 10874 [EN 685]	class	34-43	34-43
Fire rating 防火等级	EN 13501-1	class	Bfl-s1	Bfl-s1
	GB 8624-2012	class	B1(B-s1, t0)	B1(B-s1, t0)
Toxic testing 有毒有害物质检测	GB 18586-2001	-	合格	合格
Static electrical propensity 抗静电性	EN 1815	kV	< 2	< 2
Slip resistance wet 防湿滑性	DIN 51 130	class	R9	R9

PERFORMANCES 性能

Wear resistance 耐磨性	EN 660.2	mm³	≤ 2	≤ 2
Wear group 耐磨等级	EN 649	group	T	T
Type binder content 粘合剂分级	ISO 10582	type	I	I
Dimensional stability 尺寸稳定性	ISO 23999 [EN 434]	%	≤ 0.4	≤ 0.4
Residual indentation 残余凹陷度	ISO 24343-1 [EN 433]	mm	≤ 0.1	≤ 0.1
Castor chair test 椅子脚轮测试	ISO 4918 [EN 425]	-	OK	OK
Thermal conductivity 热传导性	ISO 10456 [EN 12524]	W/(m.K)	0.25	0.25
Colour fastness 颜色稳定性	ISO 105 - B02	degree	≥ 6	≥ 6
Chemical product resistance 抗化学性	ISO 26987 [EN 423]	-	OK	OK
Anti-bacterial and fungicidal treatment 抗菌防霉处理	-	-	Sanosol	Sanosol
Special maintenance treatment 特殊维护处理	-	-	Protecsol®	Protecsol®
Anti-bacterial activity 抑菌性能	ISO 22196	-	> 99 % inhibits growth 抑菌率	> 99 % inhibits growth 抑菌率
[E.coli - S.aureus - MRSA 大肠杆菌和金黄色葡萄球菌] (1)				

ENVIRONMENT / INDOOR AIR QUALITY 环保 / 室内空气质量

TVOC(2) after 28 days 28天后TVOC排放量	ISO 16000 - 6	µg/m³	< 100	< 100
Certification 证书	-	-	Floorscore®	Floorscore®

CE MARKING 标识

CE	EN 14041	防滑 供地下燃气设备使用 抗静电 防火
----	----------	------------------------------

(1) The implementation of an effective cleaning regime is the most important defence against infections. 实施有效的清洁方法是抗感染最重要的防御措施。

(2) TVOC 即挥发性有机化合物总排放量

INSTALLATION 安装

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All sea-ms must be hot welded using Gerflor® matching welding rod.

应按照当地标准进行安装。铺设地板前, 应确保地面平滑、坚硬、清洁和干燥。如有需要, 应在地面上铺设一层有效的防潮薄膜。安装地板前, 应提前24小时将地板材料放置在18-24°C室温内适应环境。所有接缝口应选用Gerflor®之配套焊条热焊处理。

MAINTENANCE 维护

No acrylic emulsion (wax) is needed for life. Maintenance should be carried out regularly to retain in the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

终生无需使用丙烯酸乳液(蜡水)。定期进行维护以使其保持外观整洁和耐用性。定期清扫和使用中性清洁剂湿擦来维护地板。或者使用具有精细喷雾垫的清洗机进行大面积地面的清洗。

⚠ Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. 橡胶会在乙烯基地板上留下无法擦拭的污点: 请勿在PVC地板上使用橡胶背衬, 用PVC或者聚酰胺(尼龙)材质替代橡胶家具背衬。

GERFLOR HEADQUARTERS 洁福总部

GERFLOR GROUP

50, Cours de la République 69100 Villeurbanne Lyon France
Tel: +33 (0) 4 7265 1000
E-mail: gerflorcontract@gerflor.com

GERFLOR CHINA 洁福中国

Gerflor Floorings (China) Co., Ltd.
洁福地板(中国)有限公司

No. 8, South Tieqin Road, Southeast Economic Devt Zone,
Changshu City, Jiangsu Province, PRC.
江苏省常熟市东南经济开发区铁琴南路8号
Tel/电话: +86 (0)512 5252 8766
Fax/传真: +86 (0)512 5252 8376
Zip/邮编: 215500

Shanghai Office
上海办公室

Rm.2501, Shanghai International Plaza, No.1318, North Sichuan Road,
Hongkou District, Shanghai City, PRC.
上海市虹口区四川北路1318号盛邦国际大厦2501室
Tel/电话: +86 (0)21 6357 8818
Fax/传真: +86 (0)21 6357 8998
Zip/邮编: 200080


Beijing Office
北京办公室

Rm. 508, Jiatai International Plaza, Building A, No. 41,
East 4th Ring Road, Chaoyang District, Beijing City, PRC.
北京市朝阳区东四环中路41号嘉泰国际大厦A座508室
Tel/电话: +86 (0)10 6583 6986
Fax/传真: +86 (0)10 6583 6892
Zip/邮编: 100025

gerflor.com
gerflor.cn

建筑 ARCHITECTURE
装饰 DECORATION
运动 SPORT
科技 TECHNOSPECIFIC

MAY 2017-05-15 Version - Indicative documentation cost RMB 75
Gerflor® has a policy of continuous product improvement, it reserves the right to change design and specifications without notice.
洁福® 一直致力于产品和技术的不间断更新, 我们保留对产品设计和技术说明的更新且恕不另行通知的权利。



随时找到 Gerflor 洁福

所有的洁福产品, 全屏模式的颜色,
相关文件和 MY TARALAY 应用程序
请登陆 <http://m.gerflor.com>
或者 «Mobiletag» 应用程序,
请微信扫码, 关注Gerflor 洁福



Health
& Safety



ISO 14001



Recycling



Life Cycle
Analysis

Committed to sustainable development

致力于可持续发展

洁福 Gerflor®

theflooringgroup