

MIPOLAM® AMBIANCE ULTRA™ MIPOLAM® 野心ULTRA™

gerflor.com
gerflor.cn



Gerflor®
theflooringgroup

EXCLUSIVE SPECIAL MAINTENANCE TREATMENT FOR ENHANCED PERFORMANCE IN **HEALTHCARE**

独一无二的特殊维护处理，
保证了洁福®地板在医疗领域中的卓越表现

STAIN BARRIER

Unrivalled level of stain and
chemical resistance

抵抗污染的坚固壁垒

卓越的抗化学试剂及耐污染性能



100% HYGIENIC

No contamination
& bacteria development

100% 卫生

不含任何污染性物质，杜绝病菌滋生



HIGH PERFORMANCE
floorcovering for heavy
traffic areas

**在超高人流量的区域
保证地板的卓越表现**



T group

T 级耐磨

evercare™

PATENTED TECHNOLOGY
BY GERFLOR®
洁福®专利技术

NO WAX FOR LIFE!

Easy to maintain with minimal
environmental impact

终生无须打蜡!

维护保养便捷，对环境影响极小



TVOC
<10
µg/m³
after 28 days

**HIGHEST
INDOOR
AIR QUALITY**


28天后TVOC排放量低于10微克
保证绝佳的室内空气质量

MIPOLAM® FLOOR & WALL SYSTEM:

100% **HYGIENIC SOLUTION**

MIPOLAM®地板与墙布系统

100% **洁净卫生**的整体解决方案

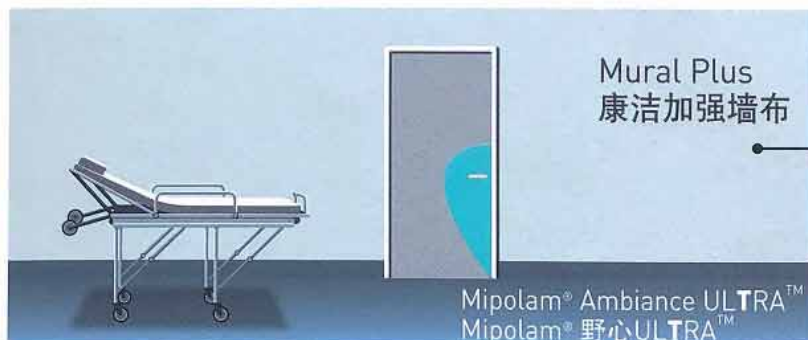

Mural Plus
acts as a buffer
against damages
(beds, trolleys...)

墙布可以有效缓冲
病床、手推车等对
墙面的撞击

100% WATERTIGHTNESS 100% 水密性

- ▶ **NO CONTAMINATION** areas between floor and wall covering
地板与墙布的成分内**不含任何污染性物质**
- ▶ **NO BACTERIA** development
杜绝细菌滋生

100% HYGIENIC 100% 洁净卫生

- ▶ Wallcovering offering **PERFECT CLEANING CHARACTERISTICS** (PUR Protect): humidity resistant and ease of maintenance
墙布提供了**完美的洁净特点**: 隔绝潮湿, 易于维护保养
- ▶ **NO BACTERIA DEVELOPMENT** with an adapted cleaning method (cleanrooms, operating theatres...)
杜绝细菌滋生: 尤其适用对洁净有超高要求的场所, 比如洁净室, 手术室等

DIMINISHING PROFILE
过渡条

COVE FORMER
阴脚条

100% DURABLE FLOORING 100% 经久耐用

- ▶ Adapted to **INTENSE TRAFFIC**
尤其适用于**超高人流量强度**的区域
- ▶ Staining resistance to healthcare products (Eosine, Iodine) with Evercare™ treatment
抗试剂污染, 比如医疗领域常见的红药水、碘酒等

100% CLEAN 100% 易于清洁

- ▶ Open angles for **PERFECT CLEANING** (mechanical and manual)
开放式的阴角系统, 不含卫生死角, 提供了**完美的清洁环境**
- ▶ The cove former avoids any damage in angles where soiling could accumulate
凹陷的圆滑曲面, 避免了角落里的藏污纳垢

STAIN BARRIER 耐染色测试

Results after cleaning with a neutral detergent 中性清洁剂擦拭后的测试结果比较

	MIPOLAM® AMBIANCE ULTRA™ MIPOLAM® 野心ULTRA™	COMPETITION A 竞品 A	COMPETITION B 竞品 B
IODINE 碘酒			
BLACK SHOE POLISH 黑色鞋油			
CARBON POWDER 碳粉			
SCUFFING 橡胶鞋跟			
BLACK MARKER 黑色油性笔			

SCRATCH RESISTANCE 耐划痕测试

Results after scratching with sand paper (200) 200 目砂纸刮擦后的测试结果

	MIPOLAM® AMBIANCE ULTRA™ MIPOLAM® 野心ULTRA™	COMPETITION A 竞品 A	COMPETITION B 竞品 B
SCRATCHING WITH SAND PAPER 砂纸刮擦			

MIPOLAM® AMBIANCE ULTRA™ MIPOLAM® 野心ULTRA™



2053 Mouse



2055 Opale



2058 Fog



2052 Ash



2054 Cloud



2050 Midnight



2056 Deer



2051 Charcoal

MURAL PLUS 康洁加强





2084 Cream



2077 Latte



2061 Sand



2062 Beach



2059 Camel



2060 Sahara



2057 Coffee



3009



3004



3001

MIPOLAM® AMBIANCE ULTRA™ MIPOLAM® 野心ULTRA™



2075 Lavander



2070 Ink blue



2063 Emerald



2069 Sky



2066 Forest



2065 Bamboo



2081 Cobalt



2068 Sea blue



2076 Storm



2067 Pool



2082 Ocean



2064 Hunting

MURAL PLUS 康洁加强



3005



3006



2083 Candy



2073 Vanilla



2079 Capuccino



2078 Corn



2071 Imperial red



2072 Terracotta



2074 Pumkin



2080 Espresso



3008



3010



MIPOLAM® AMBIANCE ULTRA™ MIPOLAM® 野心ULTRA™

gerflor.com
gerflor.cn

MIPOLAM® AMBIANCE ULTRA™ is a monolayer homogeneous pressed compacted floorcovering in sheet, with non-directional design, colour dyed as a raw mixture to ensure even color throughout the thickness and a matt finish. Its surface is densely compacted for improved wear and ease of maintenance. It is treated with Evercare™, the latest improvement in polyurethane special maintenance treatment obtained by UV laser crossing-linking. Evercare™ avoids staining of chemical products, like betadine, eosin, or anti-bacterial hand gel and increases the durability of the flooring. No wax for life! MIPOLAM® AMBIANCE ULTRA™ incorporates bacteriostatic and fungistatic actions. The flooring complies with the EN 649 [34-43] and has a Group T wear rating. It is suitable for very heavy traffic areas.

MIPOLAM® 野心ULTRA™ 是一种经过加压处理、无方向性花型设计的同质透心卷装地板。其颜色碎片与天然混合物经过特别处理后均匀的分布在地板内,并拥有哑光的表面效果。加上其色彩丰富,适合多方面的设计。其表面层经过特别加压、加密处理,以及采用洁福®独有UV紫外线激光穿透技术的Evercare™特殊维护处理,提供了卓越的抗刮痕性和耐化学物质性能(比如抗碘酒、红药水或者洗手液等化学试剂的污染),堪称目前同质透心地板工艺中的翘楚。铺装后终生无需打蜡! MIPOLAM® 野心ULTRA™ 具有抗菌和防霉的特点。该地板符合 EN 649 [34-43] 项规定,其耐磨性达到Group T的标准,适合于人流量大的地方使用。

INSTALLATION 安装

Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor® matching welding rod.

应按照当地标准进行安装。铺设地板前,应确保地面平滑、坚硬、清洁和干燥。如有需要,应在地面上铺设一层有效的防潮薄膜。安装地板前,应提前24小时将地板材料打开并平铺在18-24°C室温内适应环境。所有接缝口应选用Gerflor®之配套焊条热焊处理。

MAINTENANCE 维护

No emulsion dressing is required. Maintenance should be carried out regularly to retain in the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, more intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

铺装之后终生无需打蜡。定期进行维护以使其保持外观整洁和耐用性。定期清扫和使用中性清洁剂湿擦来维护地板。或者使用具有精细喷雾垫的清洗机进行大面积地面的清洗。

⚠ Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. 橡胶会在乙烯基地板上留下无法擦拭的污点: 请勿在PVC地板上使用橡胶背衬, 用PVC或者聚酰胺(尼龙)材质替代橡胶家具背衬。

DESCRIPTION 规格

Total thickness 总厚度	ISO 24348 [EN 428]	mm	2	1
Weight 重量	ISO 23997 [EN 430]	g/m²	2750	1750
Width / Length of sheet 卷宽 / 卷长	ISO 24341 [EN 426]	cm/lm	200 / 20	200 / 30

CLASSIFICATION 类别

Norm / Product specification 产品规范	-	-	ISO 10581 [EN 649]	EN 15102
European classification 欧洲标准	ISO 10874 [EN 685]	class	34 - 43	-
Fire rating 防火等级	EN 13 501-1	class	Bfl-s1	-
	GB 8624 - 2012	-	B1(B-s1,t0)	B1(B-s2,d0,t0)
Toxic testing 有毒有害物质检测	GB 18586-2001	-	合格	合格
Static electrical propensity 抗静电性	EN 1815	KV	<2	-
Electrical resistance 抗电阻性	EN 1081	Ω	10 ⁹ -10 ¹⁰	-
Slip resistance dry 防干滑性	EN 13893	-	≥0.3	-
Slip resistance wet 防湿滑性	DIN 51130	class	R9	-

PERFORMANCES 性能

Wear resistance 耐磨性	EN 660.2	mm³	≤2.0	-
Wear group 耐磨等级	EN 649	group	T	-
Type binder content 粘合剂分级	ISO 10581	type	I	-
Dimensional stability 尺寸稳定性	ISO 23999 [EN 434]	%	≤ 0.4	≤ 0.40
Residual indentation 残余凹陷度	ISO 24343-1 [EN 433]	mm	≤0.03	≤0.10
Castor chair test 椅子脚轮测试	ISO 4918 [EN 425]	-	OK	-
Thermal conductivity 热传导性	ISO 10456 [EN 12524]	W/(m.K)	≈0.25	-
Colour fastness 颜色稳定性	ISO 105 - B02	degree	≥ 6	≥ 6
Chemical products resistance 抗化学性	ISO 26987 [EN 423]	-	OK	OK
Anti-bacterial and fungicidal treatment 抗菌防霉处理	-	-	OK	-
Special maintenance treatment 特殊维护处理	-	-	Evercare™	PUR Protect
Anti-bacterial activity(E.coli - S.aureus - MRSA) ⁽¹⁾ 抗菌性能	ISO 22196	-	抑菌率>99%	抑菌率>99%
Color number 颜色数量	-	-	35	8

ENVIRONMENT / INDOOR AIR QUALITY 环保 / 室内空气质量

TVOC after 28 days 28天后TVOC ⁽²⁾ 排放量	ISO 16000 - 6	μg/m³	< 10	-
Certification 证书	-	-	Floorscore®	-

CE MARKING 标志

CE	EN 14041	-	ISO 9001 SGS	ISO 14001 SGS	floor score	TVOC <10 μg/m³ after 28 days
----	----------	---	-----------------	------------------	-------------	---------------------------------------

⁽¹⁾ The implementation of an effective cleaning regime is the most important defence against infections.

实施有效的清洁方法是抗感染最重要的防御措施。

⁽²⁾ TVOC: 挥发性有机化合物总排放量



Committed to sustainable development
致力于可持续发展



洁福 Gerflor®
theflooringgroup

GERFLOR CHINA 洁福中国
SHANGHAI OFFICE 上海办公室 Tel. / 电话: + 86-21-63578818
BEIJING OFFICE 北京办公室 Tel. / 电话: + 86-10-65836986

DEC 2016-12-15 Version - Indicative documentation cost RMB 34
Gerflor, has a policy of continuous product improvement, it reserves the right to change design and specifications without notice.
洁福® 一直致力于产品和技术的不间断更新, 我们保留对产品设计和技术说明的更新且恕不另行通知的权利。